


Lihtsad ja nutikad energialahendused - Eesti PHAJ

ESTIS

17.12.2018

Peep Siitam

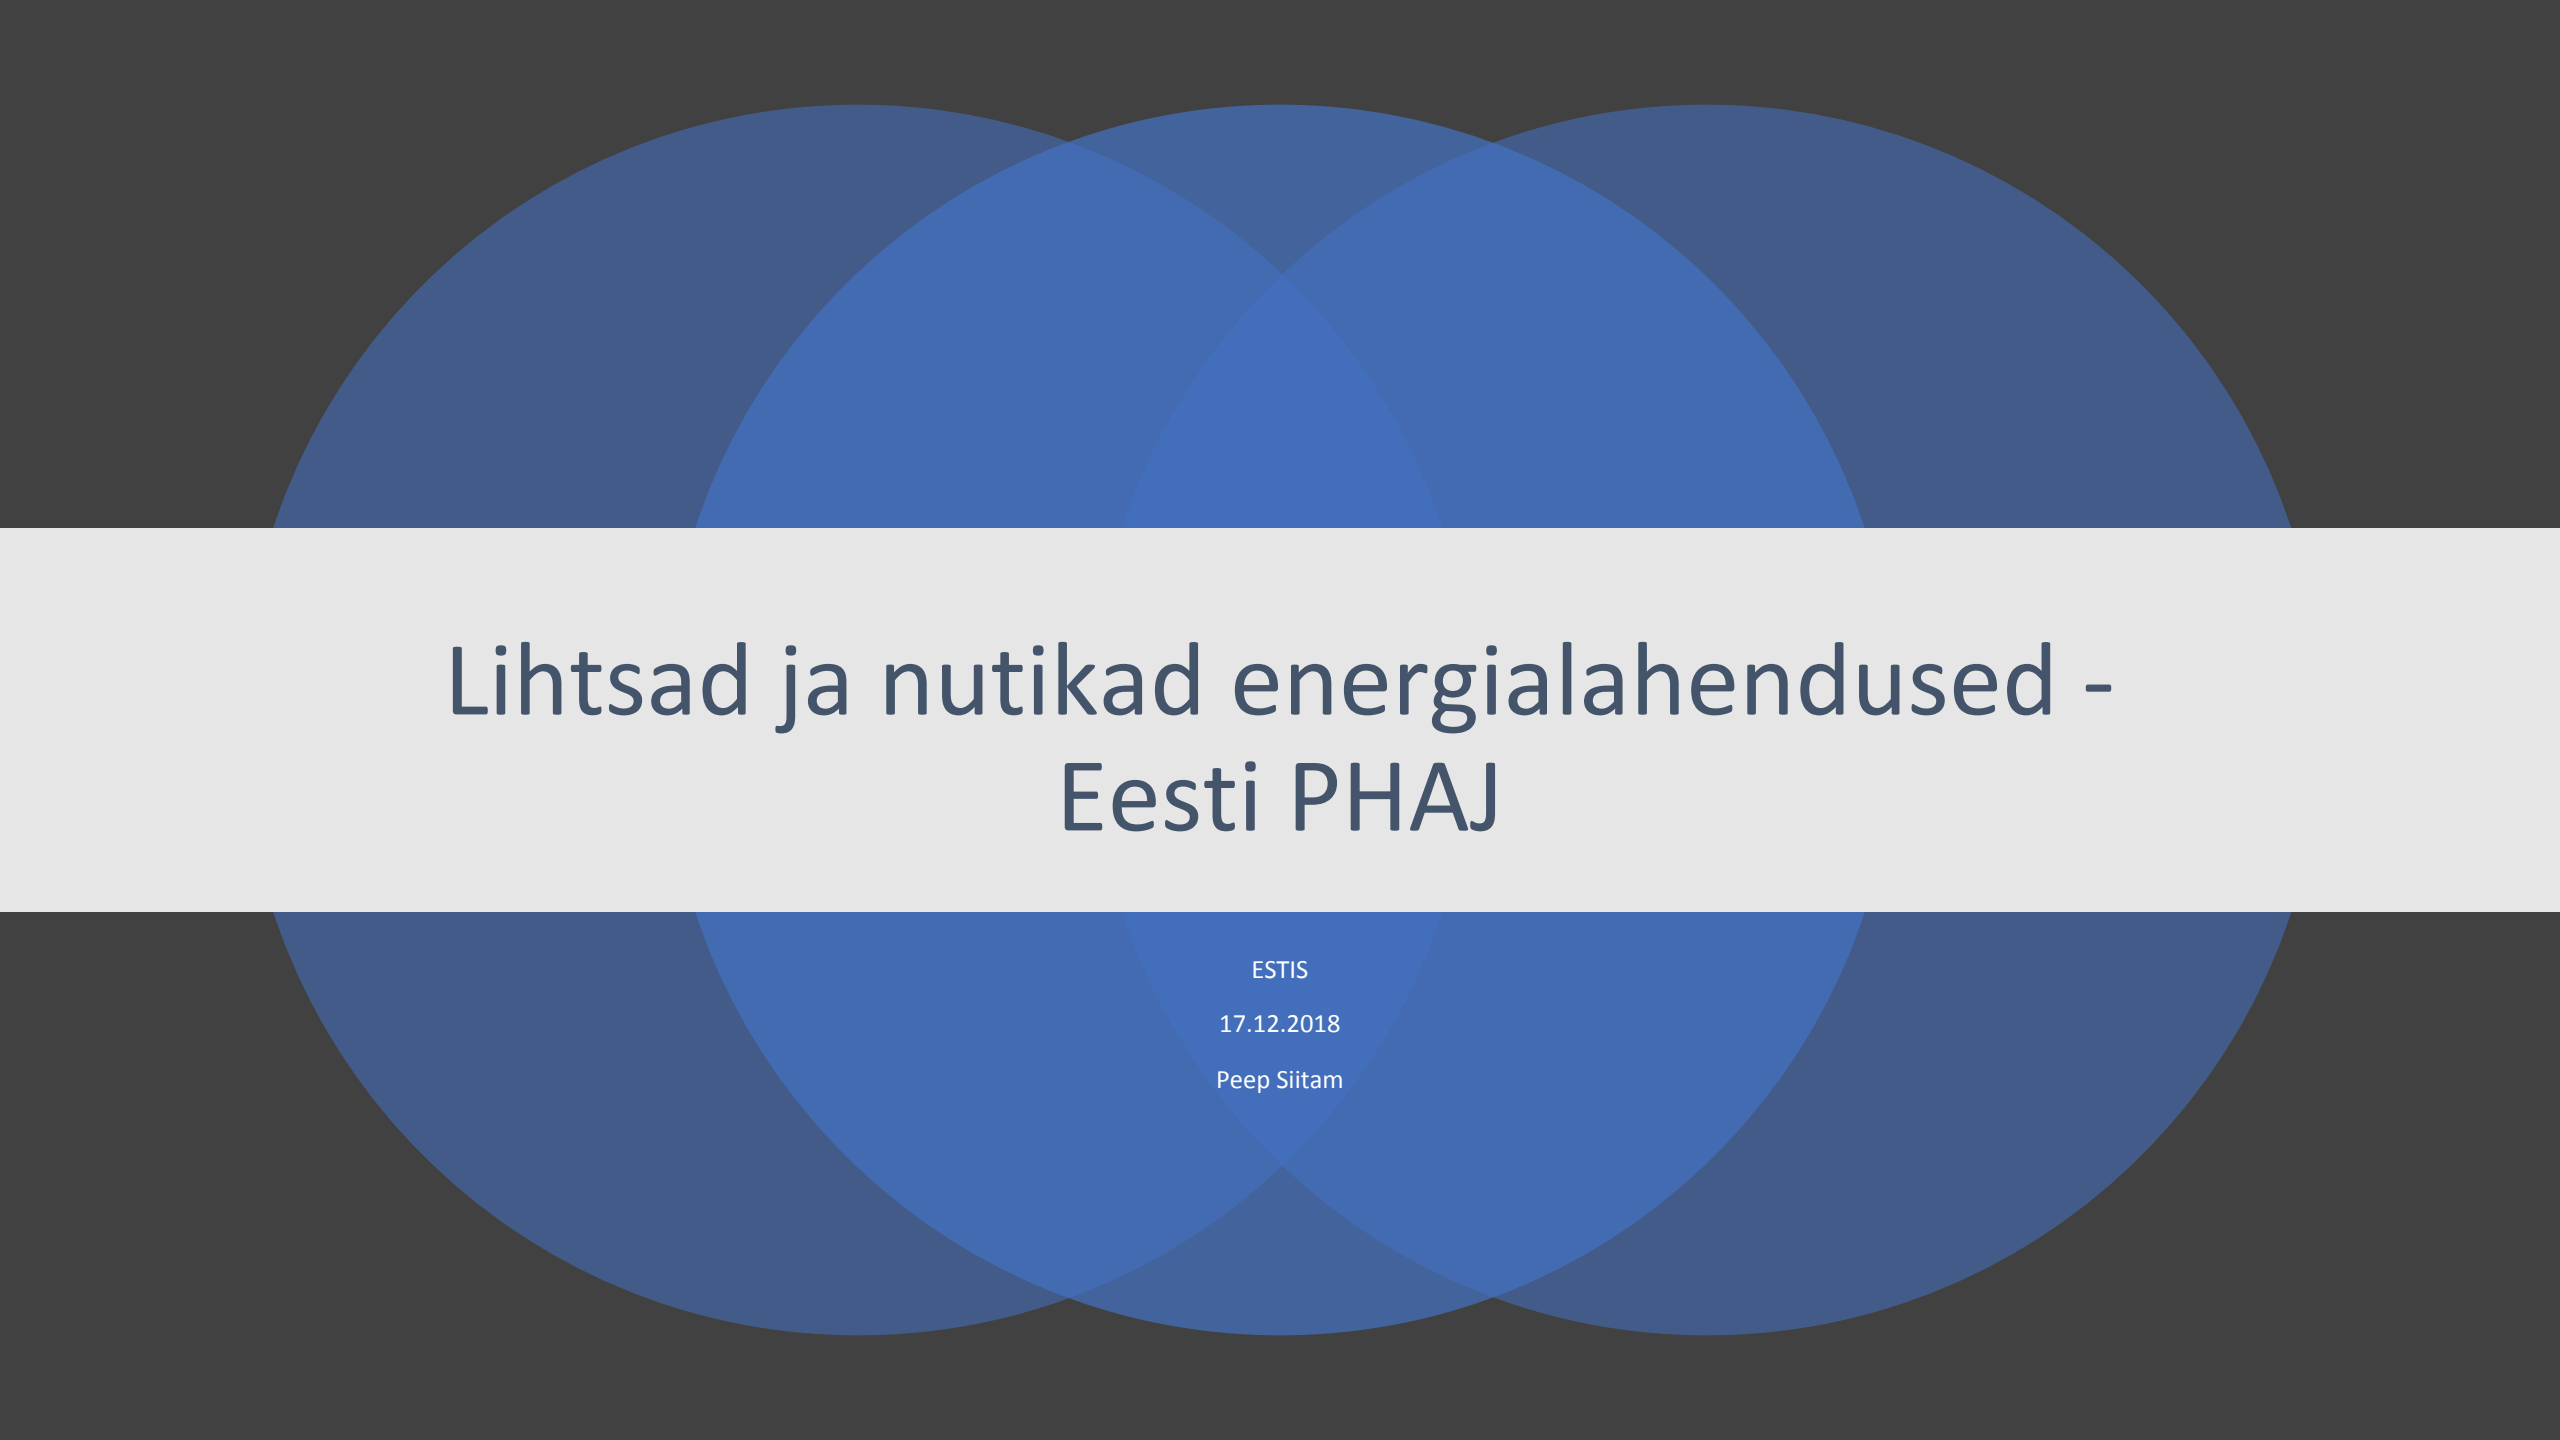

Lihtsad ja nutikad energialahendused - Eesti PHAJ

ESTIS

17.12.2018

Peep Siitam

VOO|




Kes me oleme?

Miks me seda teeme?


Meie tahame sellist Eestit:


- Unikaalne;
- Sünergiat loov;
- Suure lisandväärtusega;
- Ettevõtlik.

Eestis on innovaatilisi tooteid ja teenuseid turule toovate ettevõtete osakaal OECD madalaim (2017)

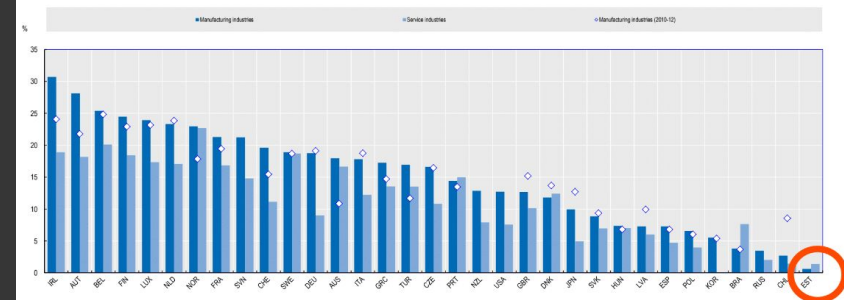

Kasum, kulud ja riigieelarve, tEUR

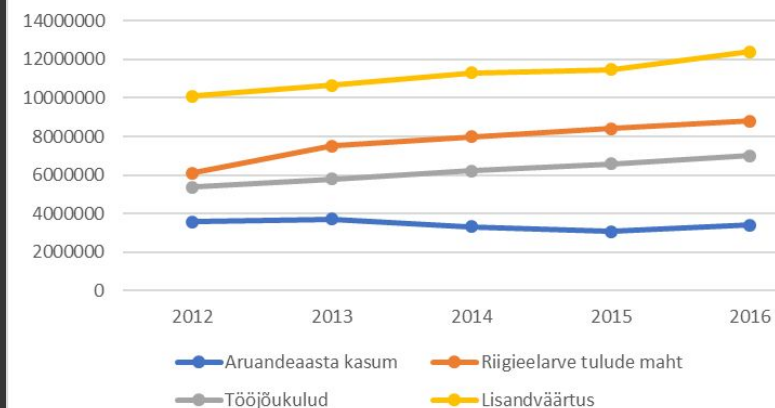

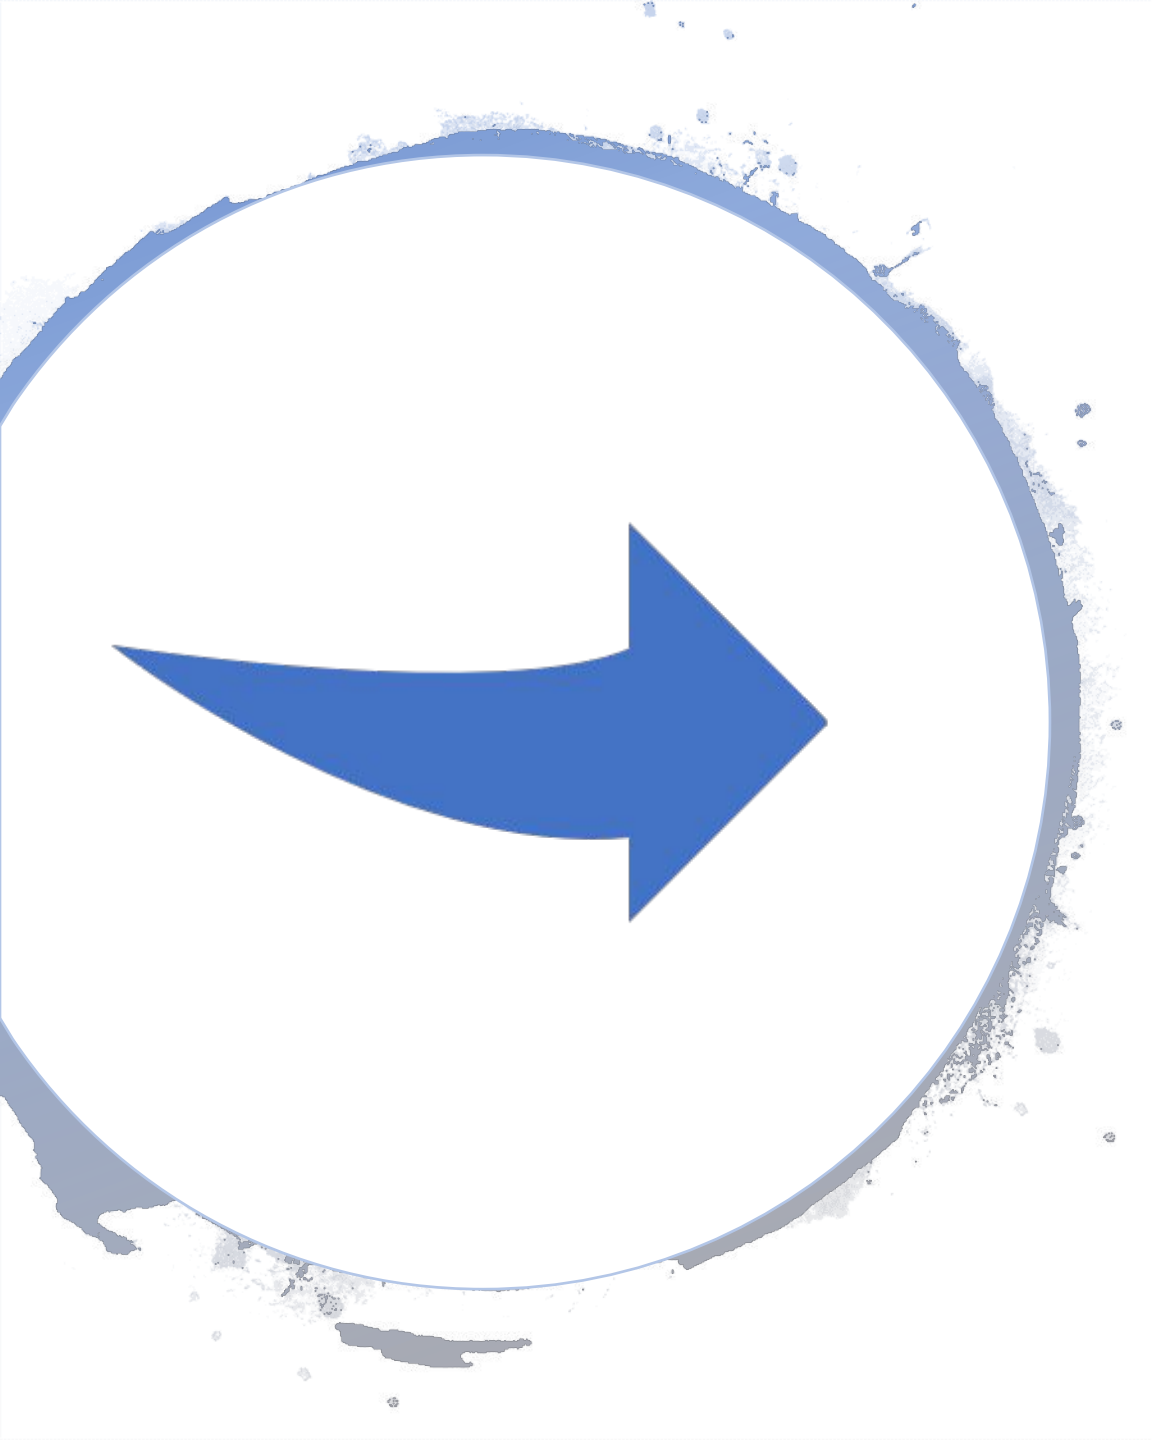

Projektiidee

Kahe strateegilise valdkonna teadmise
ühendamine ja väljakutsete lahendamine
muudab projekti majanduslikult tasuvaks ja
ühiskonnale kasulikuks

- Energeetika
- Ehitusmaterjalide tootmine

Teiste mõtteid idee toetuseks

- According to market research firm IHS, the global energy storage market is growing exponentially to an annual installation size of 6 gigawatts (GW) in 2017 and over 40 GW by 2022 — from an initial base of only 0.34 GW installed in 2012 and 2013
- “A next-generation [smart grid](#) without [energy storage](#) is like a computer without a hard drive: severely limited.”
- Katie Fehrenbacher, GigaOm



Kogemustepagas

Maailmas sajad PHAJ, Baltimaades Kruonise PHAJ Leedus;

1980-ndad ehitusgeoloogilised uuringud Maardu graniidimaardlas: ehituskillustik, kaeveõõnte teisene kasutus – hüdro-akumulatsioonijaam

2001 kaevandusloa taotlus Maardu II graniidimaardla kasutuselevõtuks – polnud majanduslikult otstarbekas

2009 – 2016 PHAJ Jõelähtme vallas

2013 – EU PCI project, ühishuviprojekt (nt Estlink 1 ja 2, Harku-Keila-Sindi, Eesti-Läti 3.ühendus, jne.)

2016 –Paldiski

Miks Paldiski?:


- Kivimi kvaliteet, mere sügavus
- Koostöö KOV-ga esimesest päevast
- Koostöö RahM, MKM

Eestile


1. Majandus
 - Energiahinna vähenemine ja prognoositavus
 - Suur lisandväärtus hõivatud kohtades
 - Väliskaubandusbilansi oluline paranemine
2. Energeetika
 - EU PCI project
 - Salvestus kui energeetika põhiküsimus
 - Võimalikud (!?) süsteemiteenused: inerts, pöörlev reserv, black-start, regionaalse stabiilsuse kontroll, sünkroonne kondensaator, ülekandekulude vähendamine süsteemide vahel
3. Keskkond
 - CO2 vähendamine energeetikas (ca. 10-15mEUR/a) ja maavarade kasutamises
 - Maakasutuse ja ressursikasutuse paranemine
 - Kestvamad teed

Struktursed muutused toetavad PHAJ rajamist

Wind and solar expansion¹

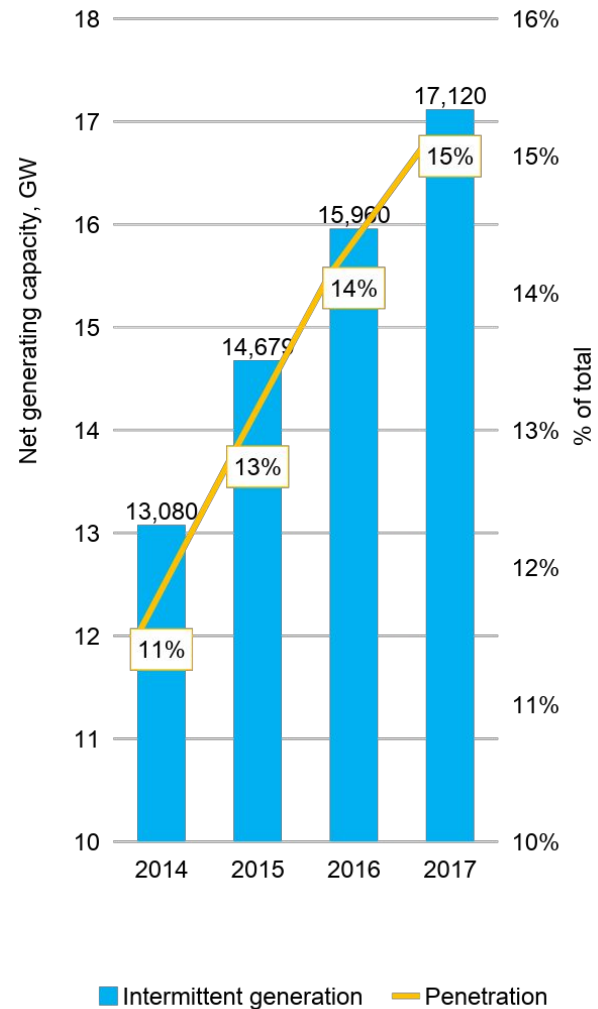

Less competition at peak demand¹

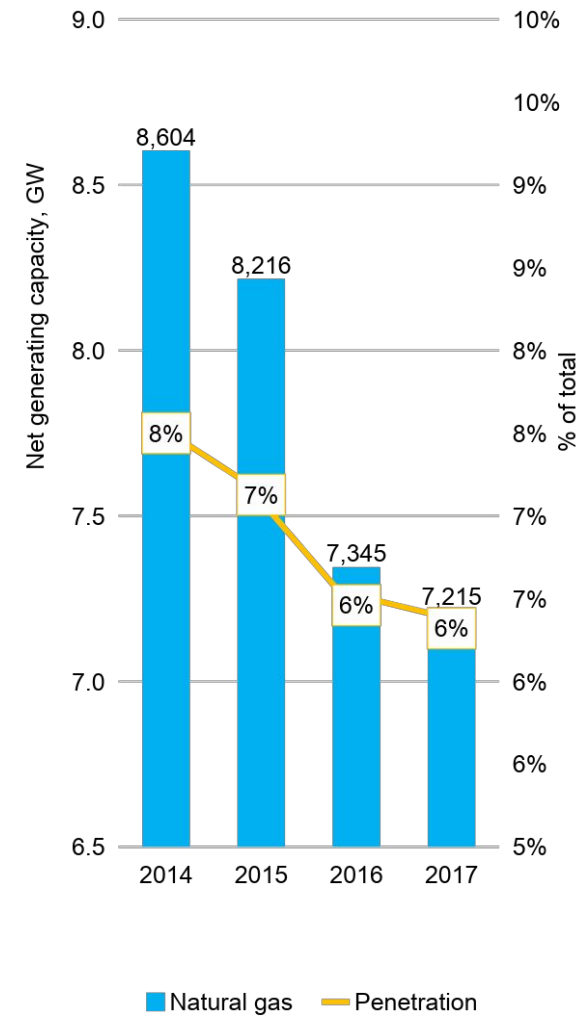

¹ Source: ENTSO-E

² Extreme price defined as period average price +/- 2x standard deviation, assuming normal distribution ca 5% of observations should be excluded (implied boundaries >60,6 EUR/MWh and <8,4 EUR/MWh)

		Selected Advantages	Selected Disadvantages
Mechanical/Gravity/Thermal	Compressed Air	<ul style="list-style-type: none"> • Low cost, flexible sizing, relatively large-scale • Mature technology and well-developed design • Proven track record of safe operation • Leverages existing gas turbine technologies 	<ul style="list-style-type: none"> • Requires suitable geology • Relatively difficult to modularize for smaller installations • Exposure to natural gas price changes • Relies on natural gas
	Flywheel	<ul style="list-style-type: none"> • High power density and scalability for short-duration technology; low power, higher energy for long-duration technology • High depth of discharge capability • Compact design with integrated AC motor 	<ul style="list-style-type: none"> • Relatively low energy capacity • High heat generation • Sensitive to vibrations
	Pumped Hydro	<ul style="list-style-type: none"> • Mature technology (commercially available; leverages existing hydropower technology) • High-power capacity solution • Large scale, easily scalable in power rating 	<ul style="list-style-type: none"> • Relatively low energy density • Limited available sites (i.e., water availability required) • Cycling generally limited to once per day
	Thermal	<ul style="list-style-type: none"> • Low cost, flexible sizing, relatively large-scale • Power and energy ratings independently scalable • Leverages mature industrial cryogenic technology base; can utilize waste industrial heat to improve efficiency 	<ul style="list-style-type: none"> • Technology is pre-commercial • Difficult to modularize for smaller installations • On-site safety concerns from cryogenic storage
Chemical	Flow Battery [‡]	<ul style="list-style-type: none"> • Power and energy profiles independently scalable for Vanadium system • Zinc-Bromide designed in fixed modular blocks for system design • No degradation in “energy storage capacity” • No potential for fire • High cycle/lifespan 	<ul style="list-style-type: none"> • Power and energy rating scaled in a fixed manner for zinc-bromide technology • Electrolyte based on acid • Relatively high balance of system costs • Reduced efficiency due to rapid charge/discharge
	Lead-Acid [‡]	<ul style="list-style-type: none"> • Mature technology with established recycling infrastructure • Advanced lead-acid technologies leverage existing technologies • Low cost 	<ul style="list-style-type: none"> • Poor ability to operate in a partially charged state • Relatively poor depth of discharge and short lifespan • Acid based electrolyte
	Lithium-Ion ^{‡(1)}	<ul style="list-style-type: none"> • Multiple chemistries available • Rapidly expanding manufacturing base leading to cost reductions • Efficient power and energy density • Cost reduction continues 	<ul style="list-style-type: none"> • Cycle life limited, especially in harsh conditions • Safety issues from overheating • Requires advanced manufacturing capabilities to achieve high performance
	Sodium [‡]	<ul style="list-style-type: none"> • High temperature technology: Relatively mature technology (commercially available); high energy capacity and long duration • Low temperature technology: Smaller scale design; emerging technology and low-cost potential; safer 	<ul style="list-style-type: none"> • Although mature, inherently higher costs—low temperature batteries currently have a higher cost with lower efficiency • Potential flammability issues for high-temperature batteries • Poor cycling capability
	Zinc [‡]	<ul style="list-style-type: none"> • Deep discharge capability • Designed for long life • Designed for safe operation 	<ul style="list-style-type: none"> • Currently unproven commercially • Lower efficiency • Poor cycling/rate of charge/discharge




Technologies analyzed in LCOS 3.0.

Source: DOE Energy Storage Database.

‡ Denotes battery technology.

(1) Lithium-Ion assessed on this report is NMC (Lithium, Nickel, Manganese, Cobalt).

Levelized Cost of Storage Components—Low

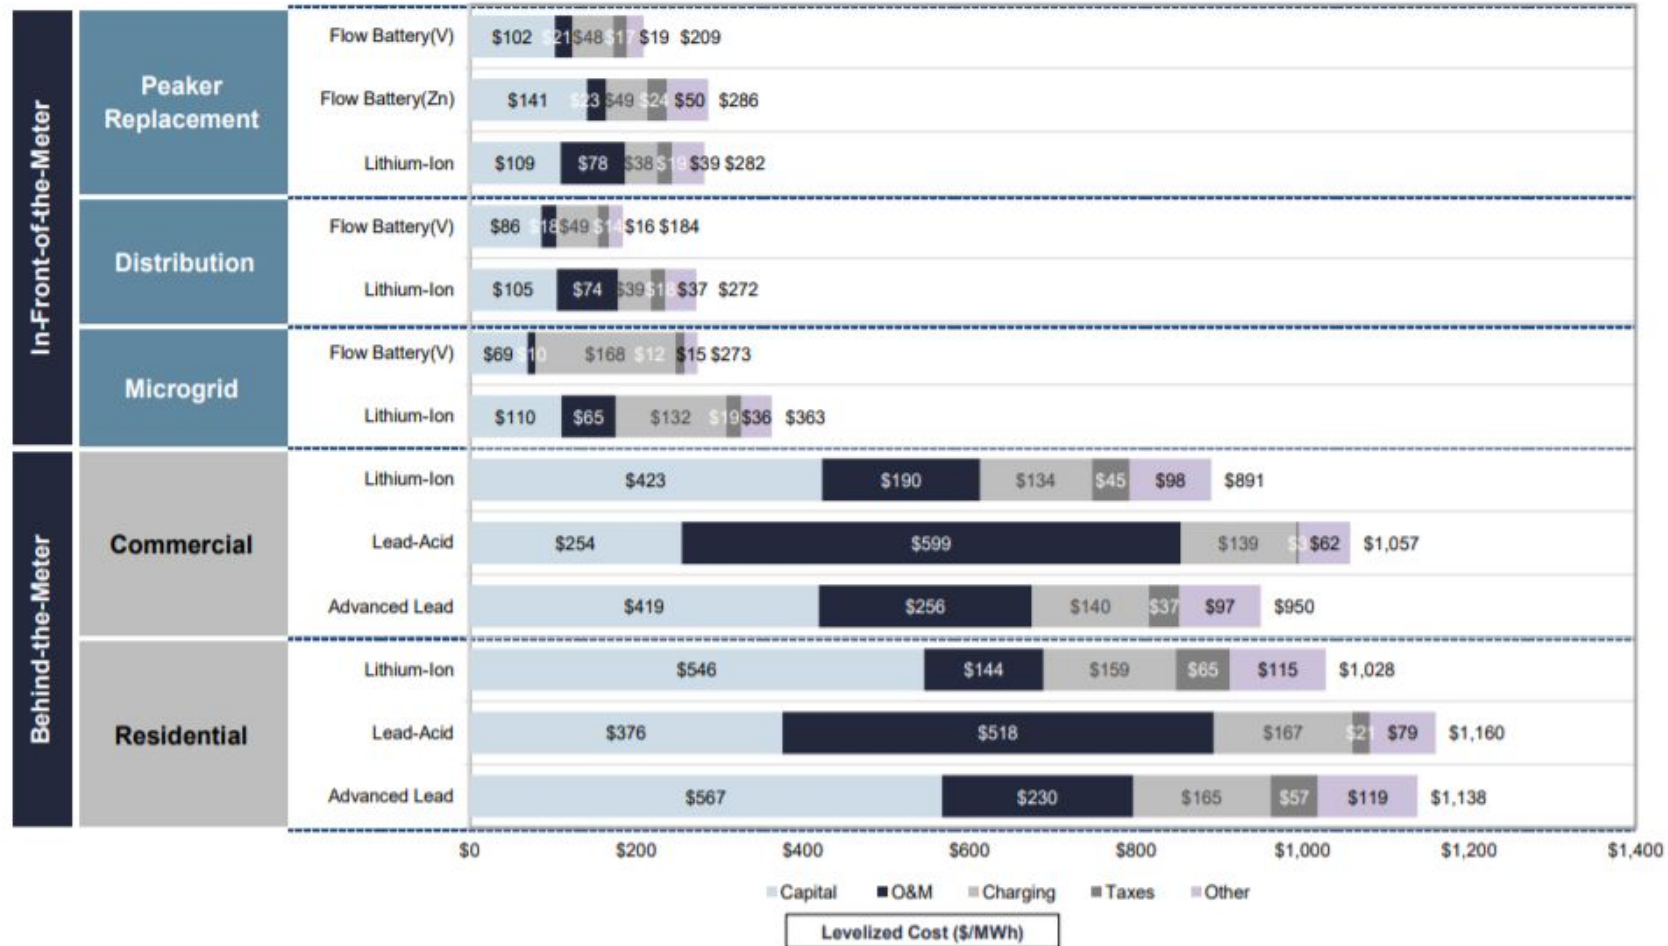



Source: Lazard and Enovation Partners estimates.
 Note: O&M costs include augmentation costs.




Elektrienergia hind LCOE



Alternatiivsed tehnoloogiad


Traditsionaalsed tehnoloogiad

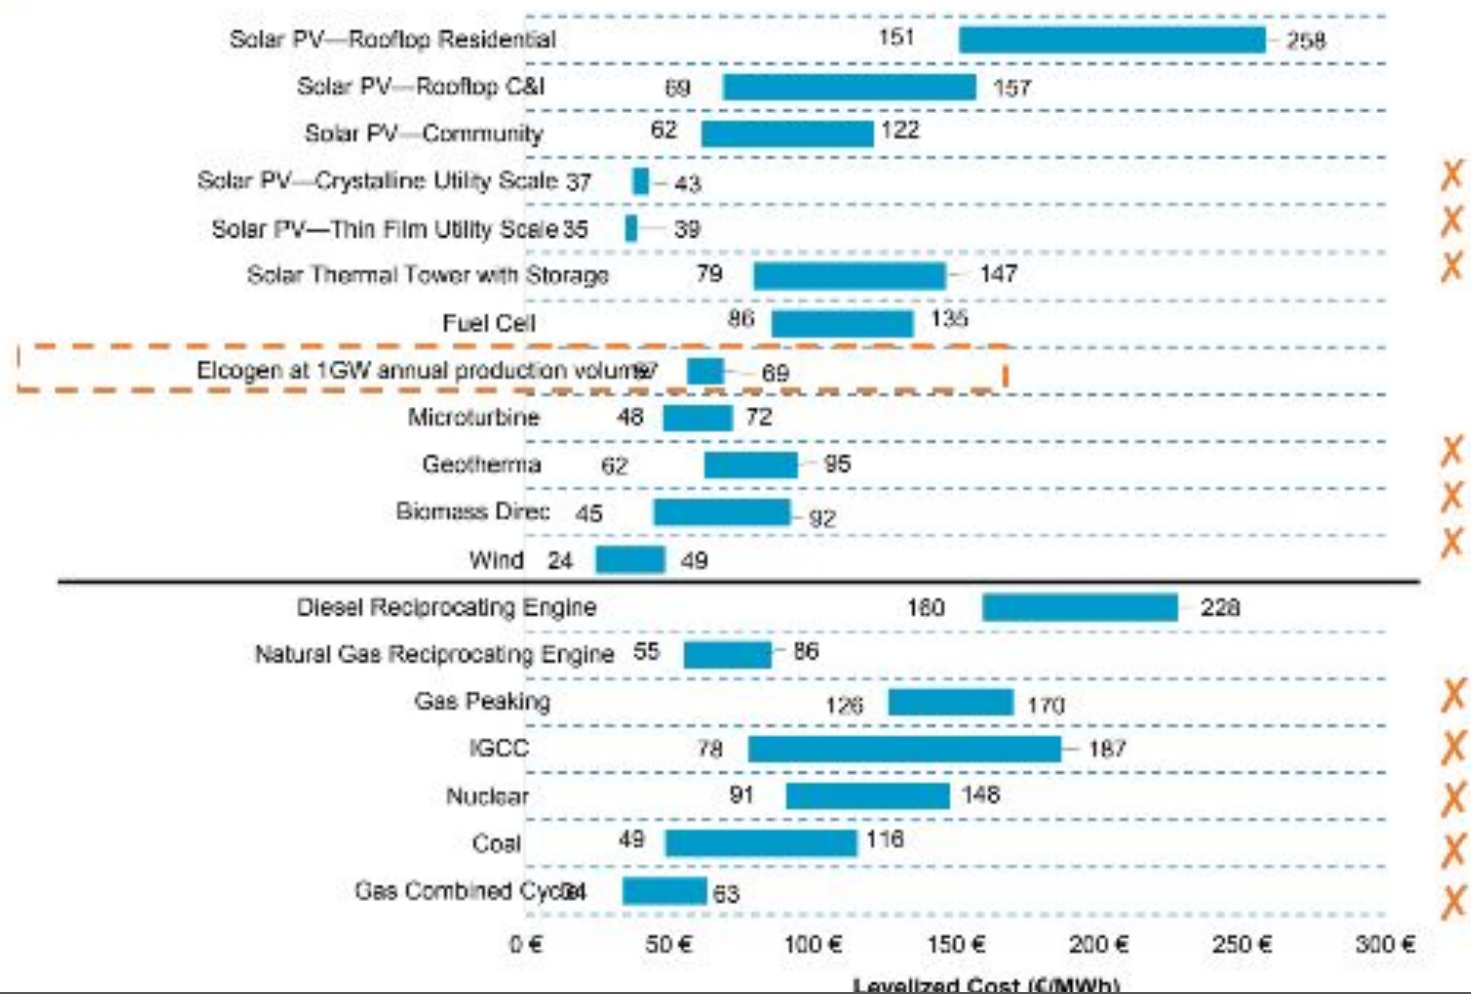


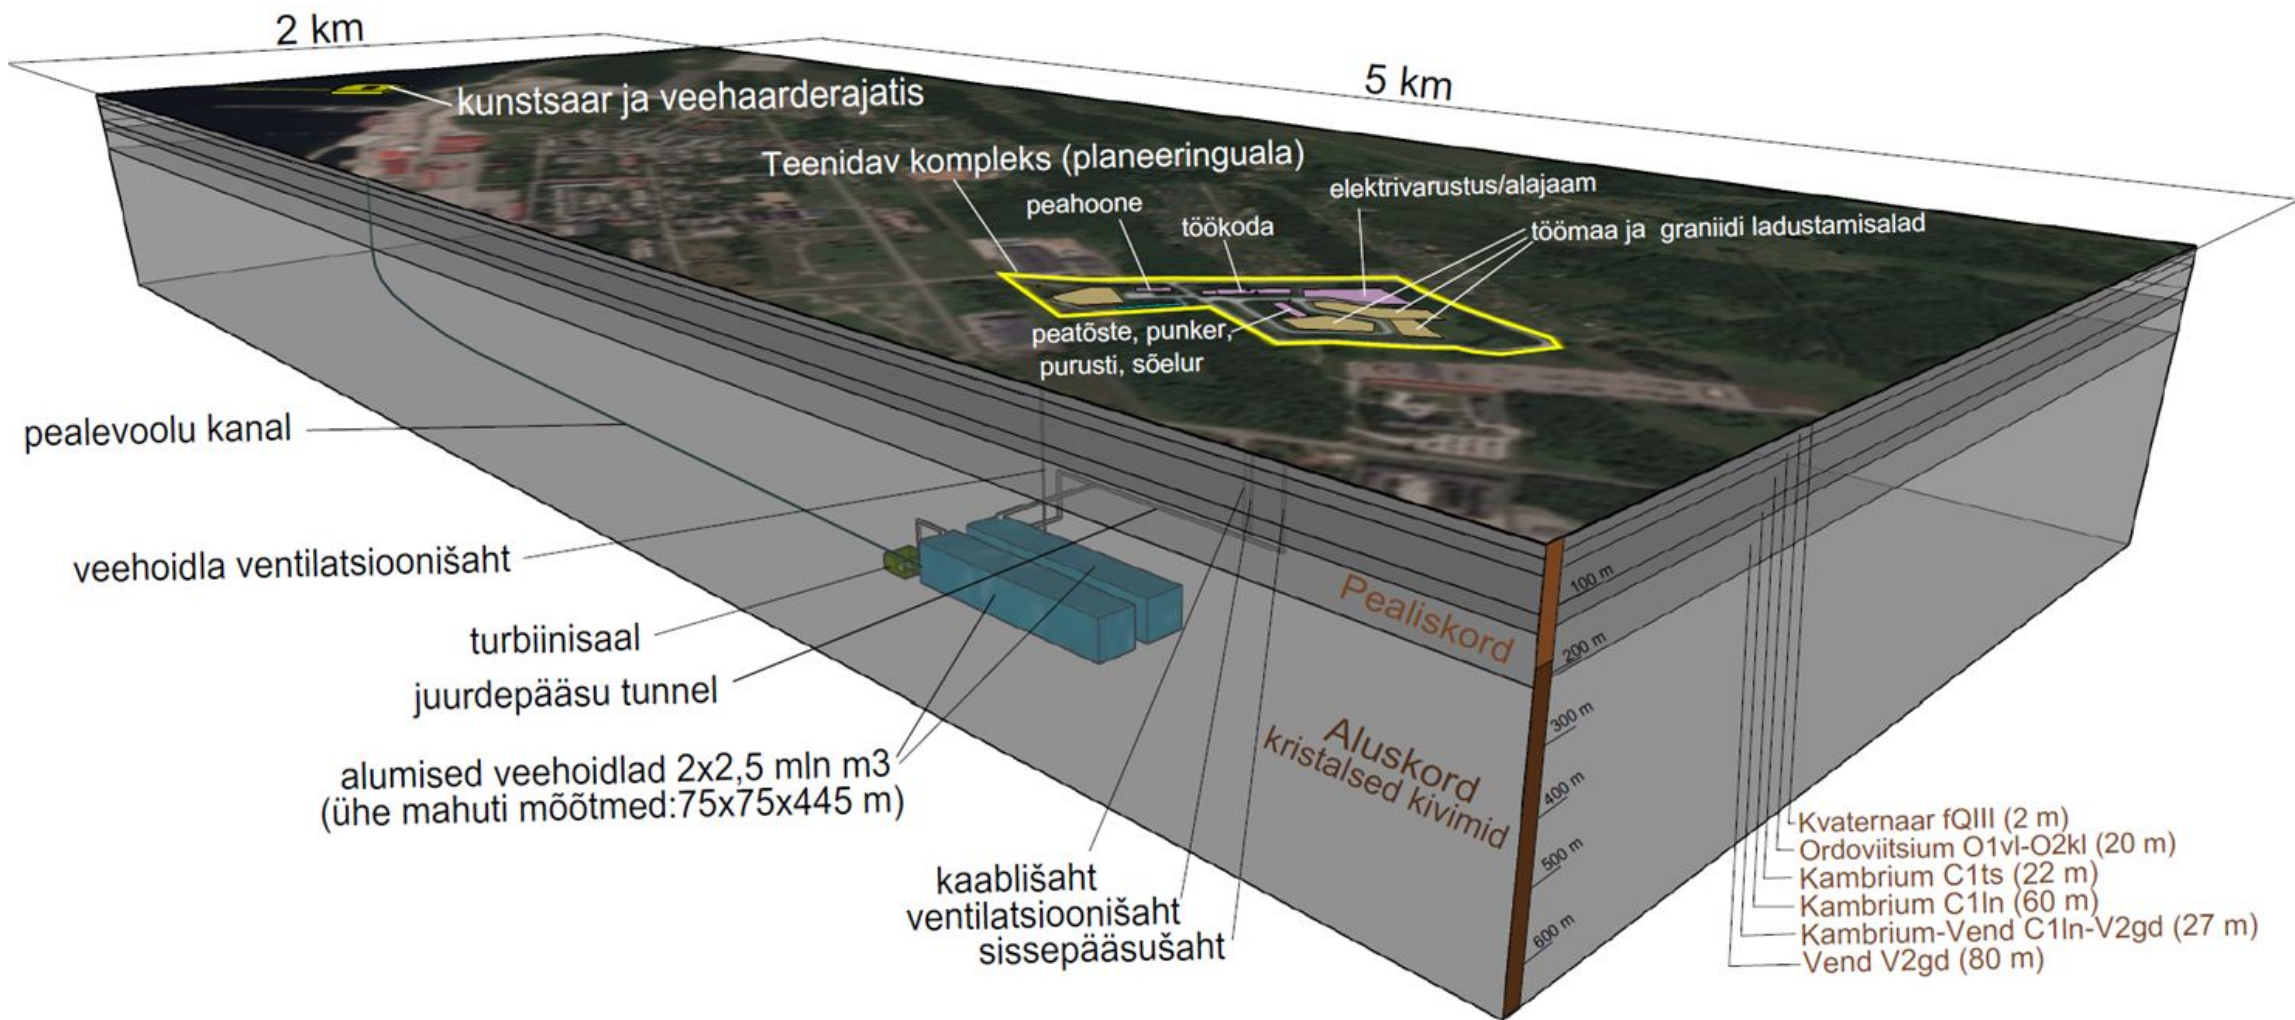

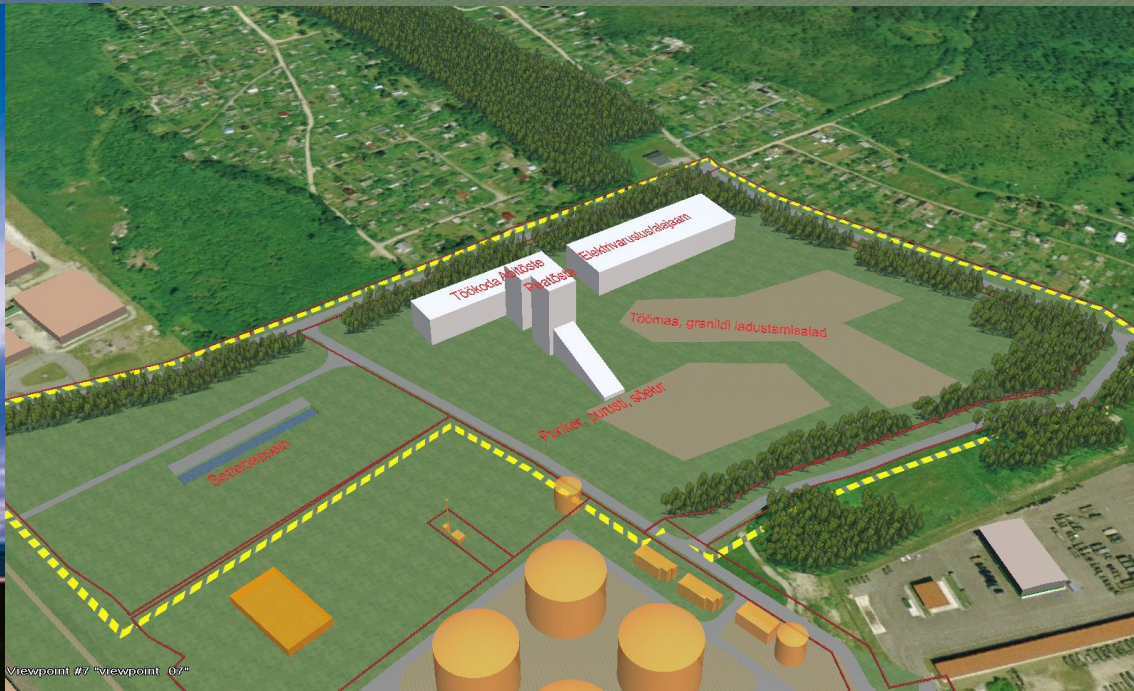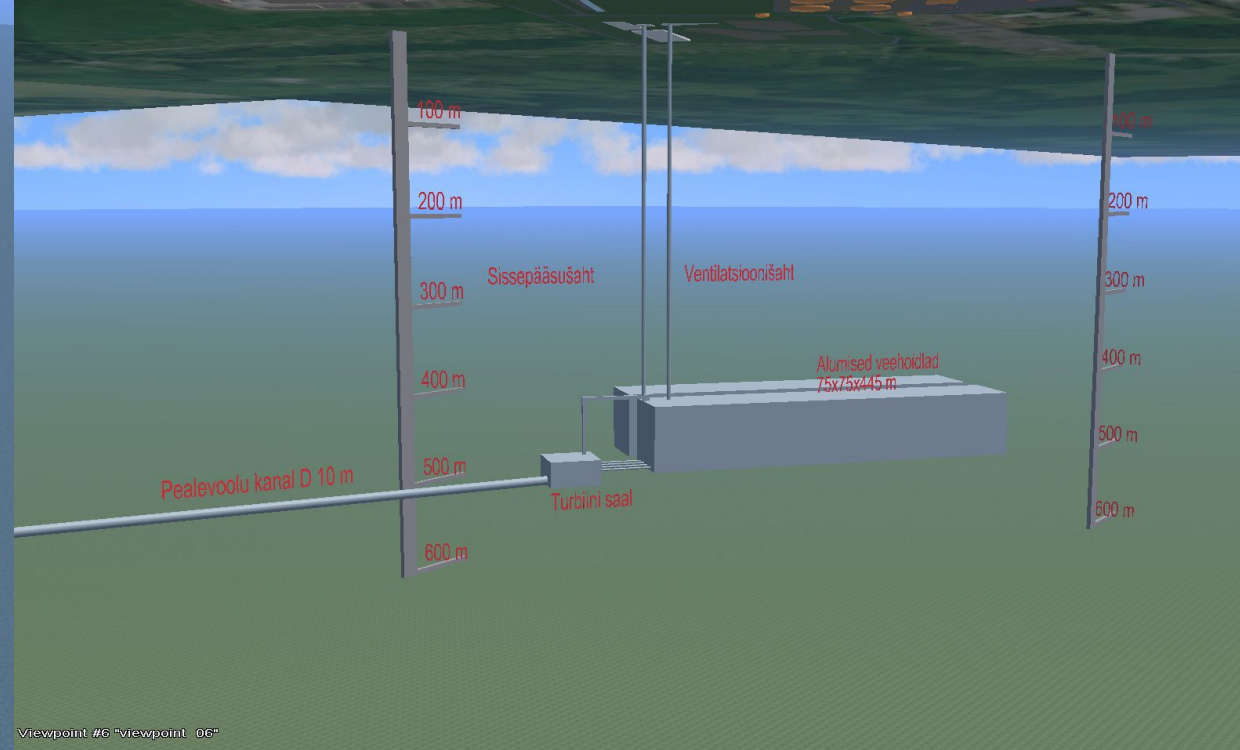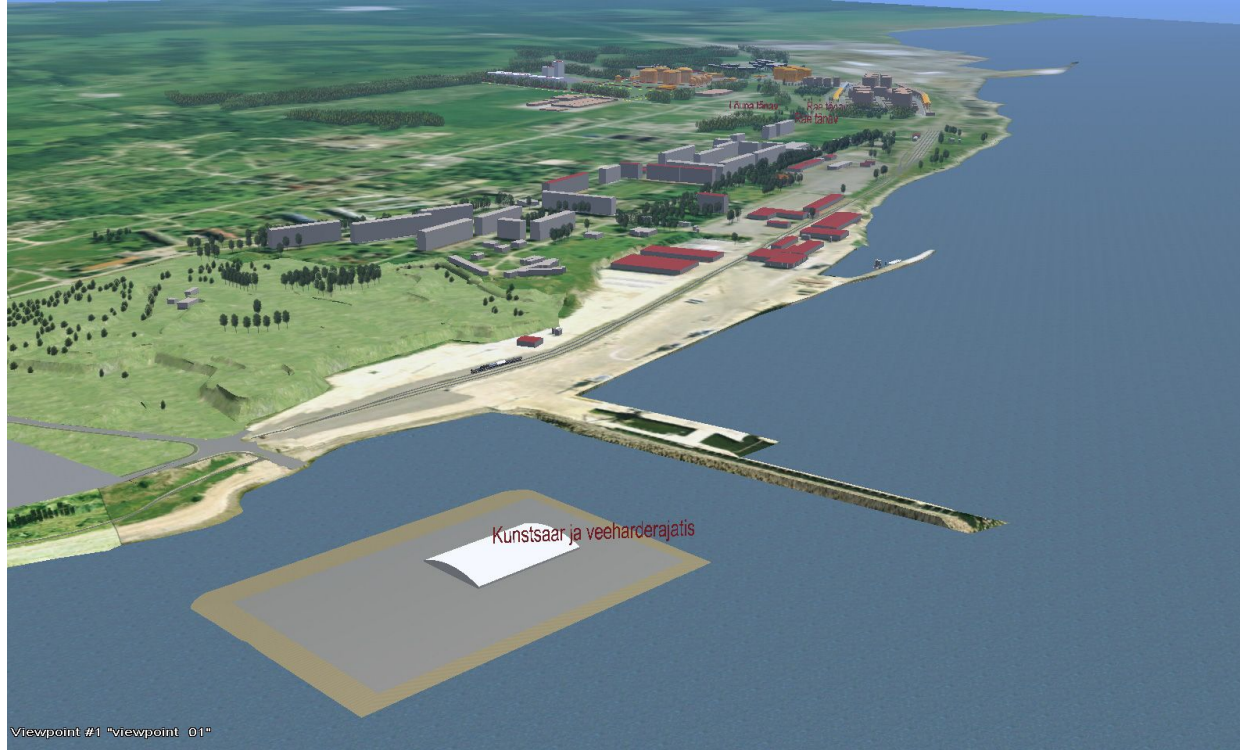

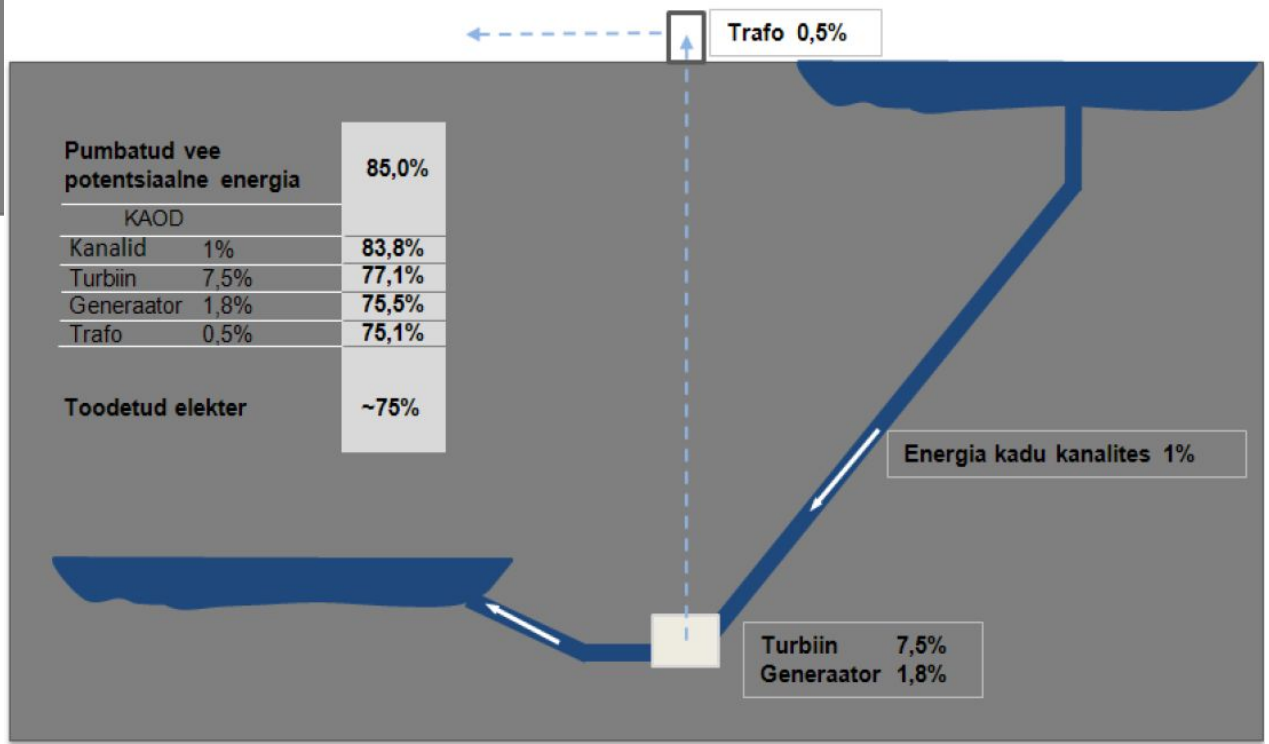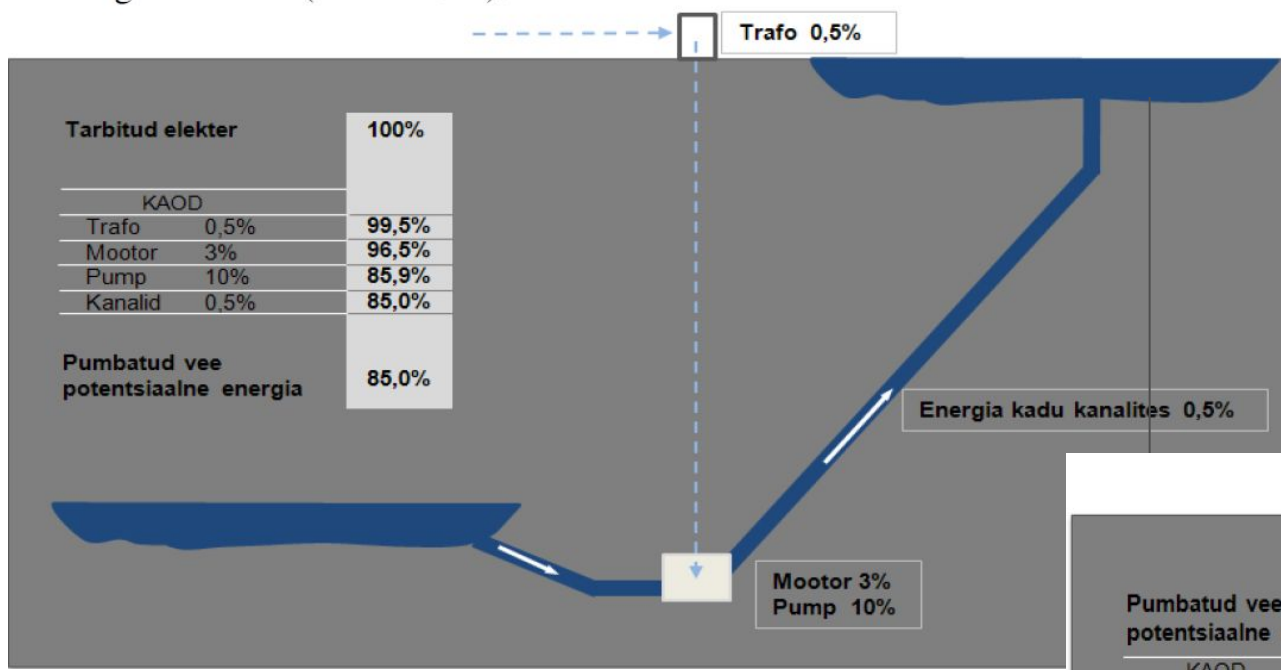

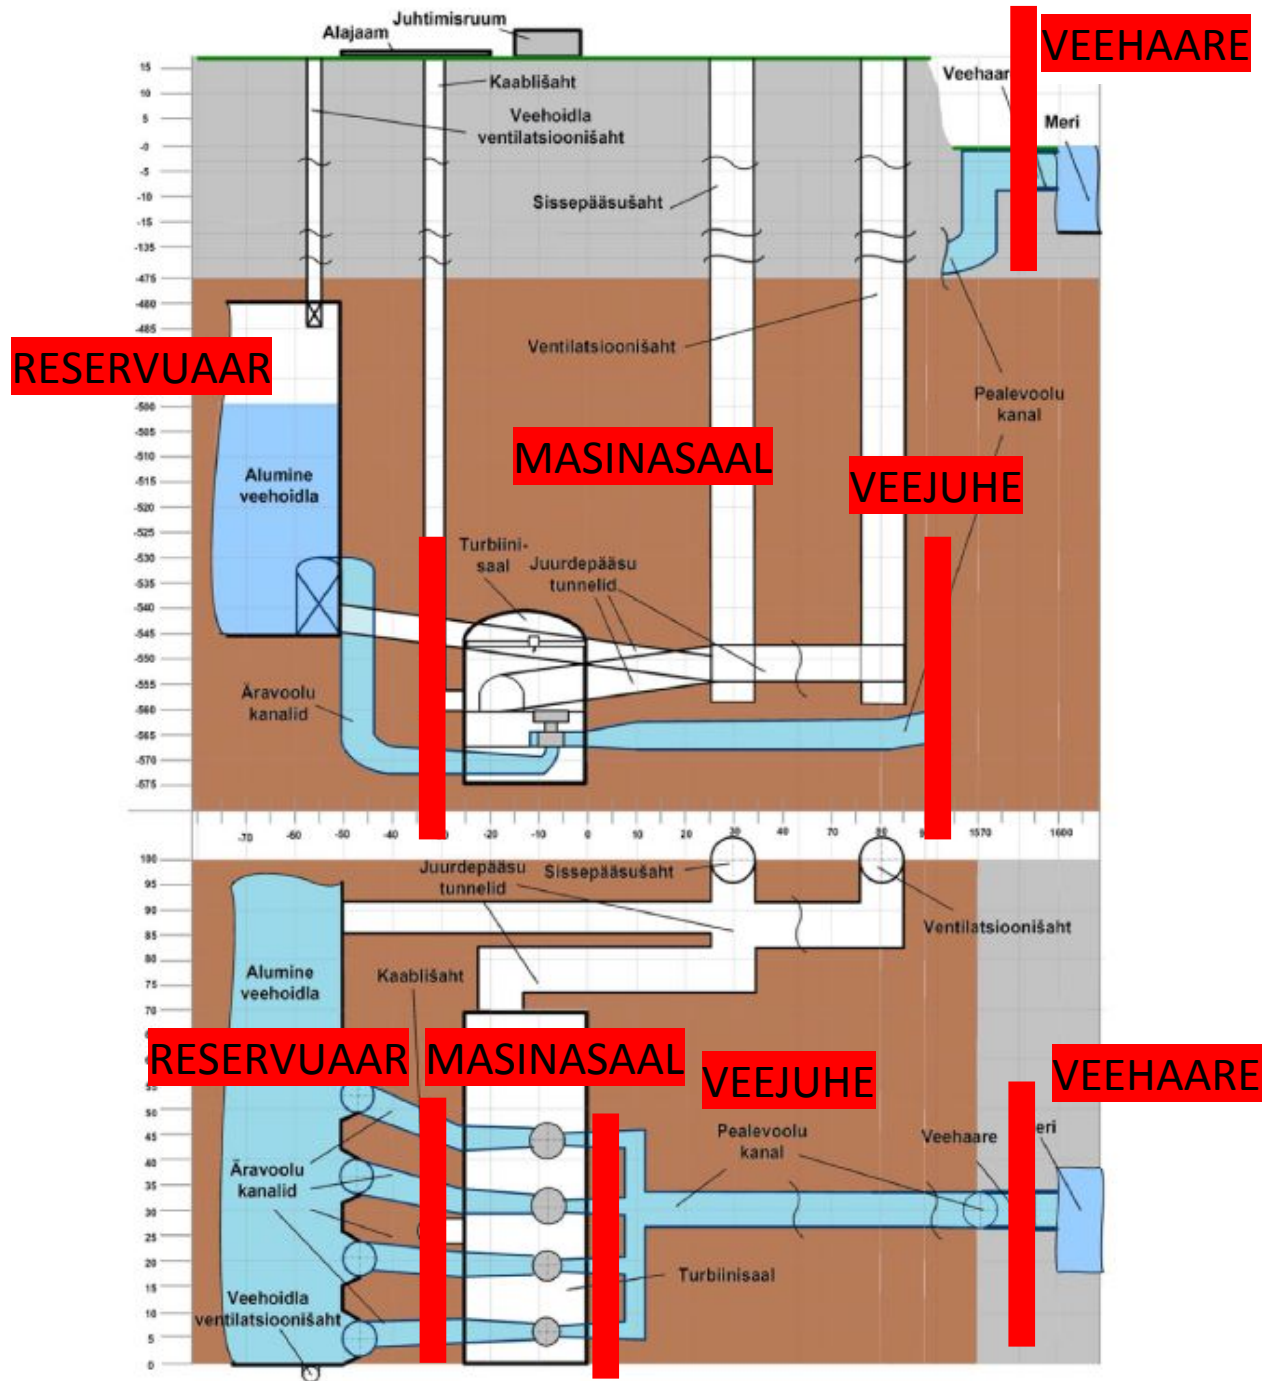

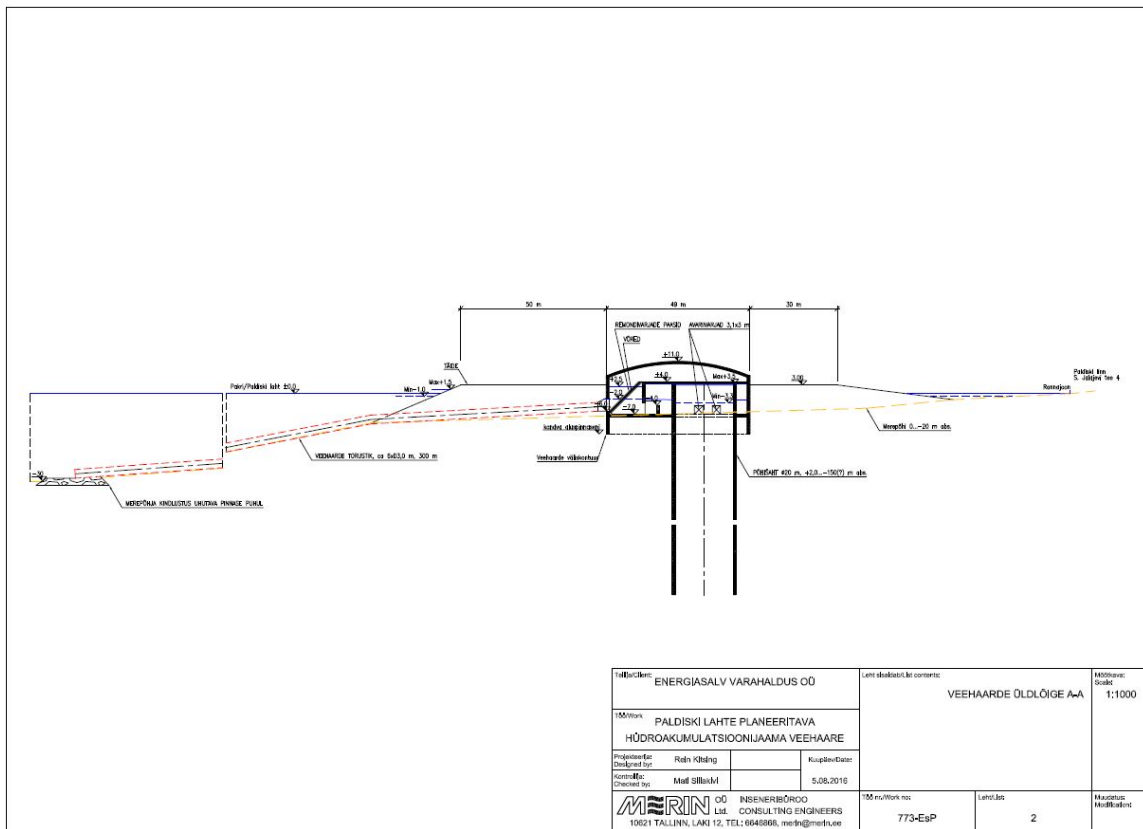

Tellijätk: ENERGIASALV VARAHALDUS OÜ		Lennu tegevise kirjeldus:		Mõõtmise:	
		VEEHAARDE ÖLDLÕIGE A-A		1:1000	
Töönime: PALDISKI LAHTE PLANEERITAVA HÜDROAKUMULATSIOONIJAMMA VEEHAARE					
Projektor:	Rahv Kõbeling	Kaardid/Date:			
Disainija:		5.08.2016			
Kontroll:	Mari Sillakivi				
Check:					
MERIN OÜ INGENIERIBÜROO LTD. CONSULTING ENGINEERS 10121 TALLINN, LAHI 12, TEL: 6648866, merin@merin.ee		Töö nr./Work no:	Lennu järk:	Mõõtmise:	
		773-EsP	2	Mõõtmise:	


Tegevus	Aasta
DP, HL, KSH, KMH	2016-2018
Ehitusluba	2019
Algkaeveõõned	2020-2021
Ehitus	2021-2027
Veehaare	2025-2027
330 kV	2025-2026
Elektriseadmed	2025-2027
Käivitamine	2028



TÄNAN!
KÜSIMUSED...

Summary Findings of Lazard's 2017 Levelized Cost of Energy Analysis⁽¹⁾

Selected Historical Mean LCOE Values⁽²⁾

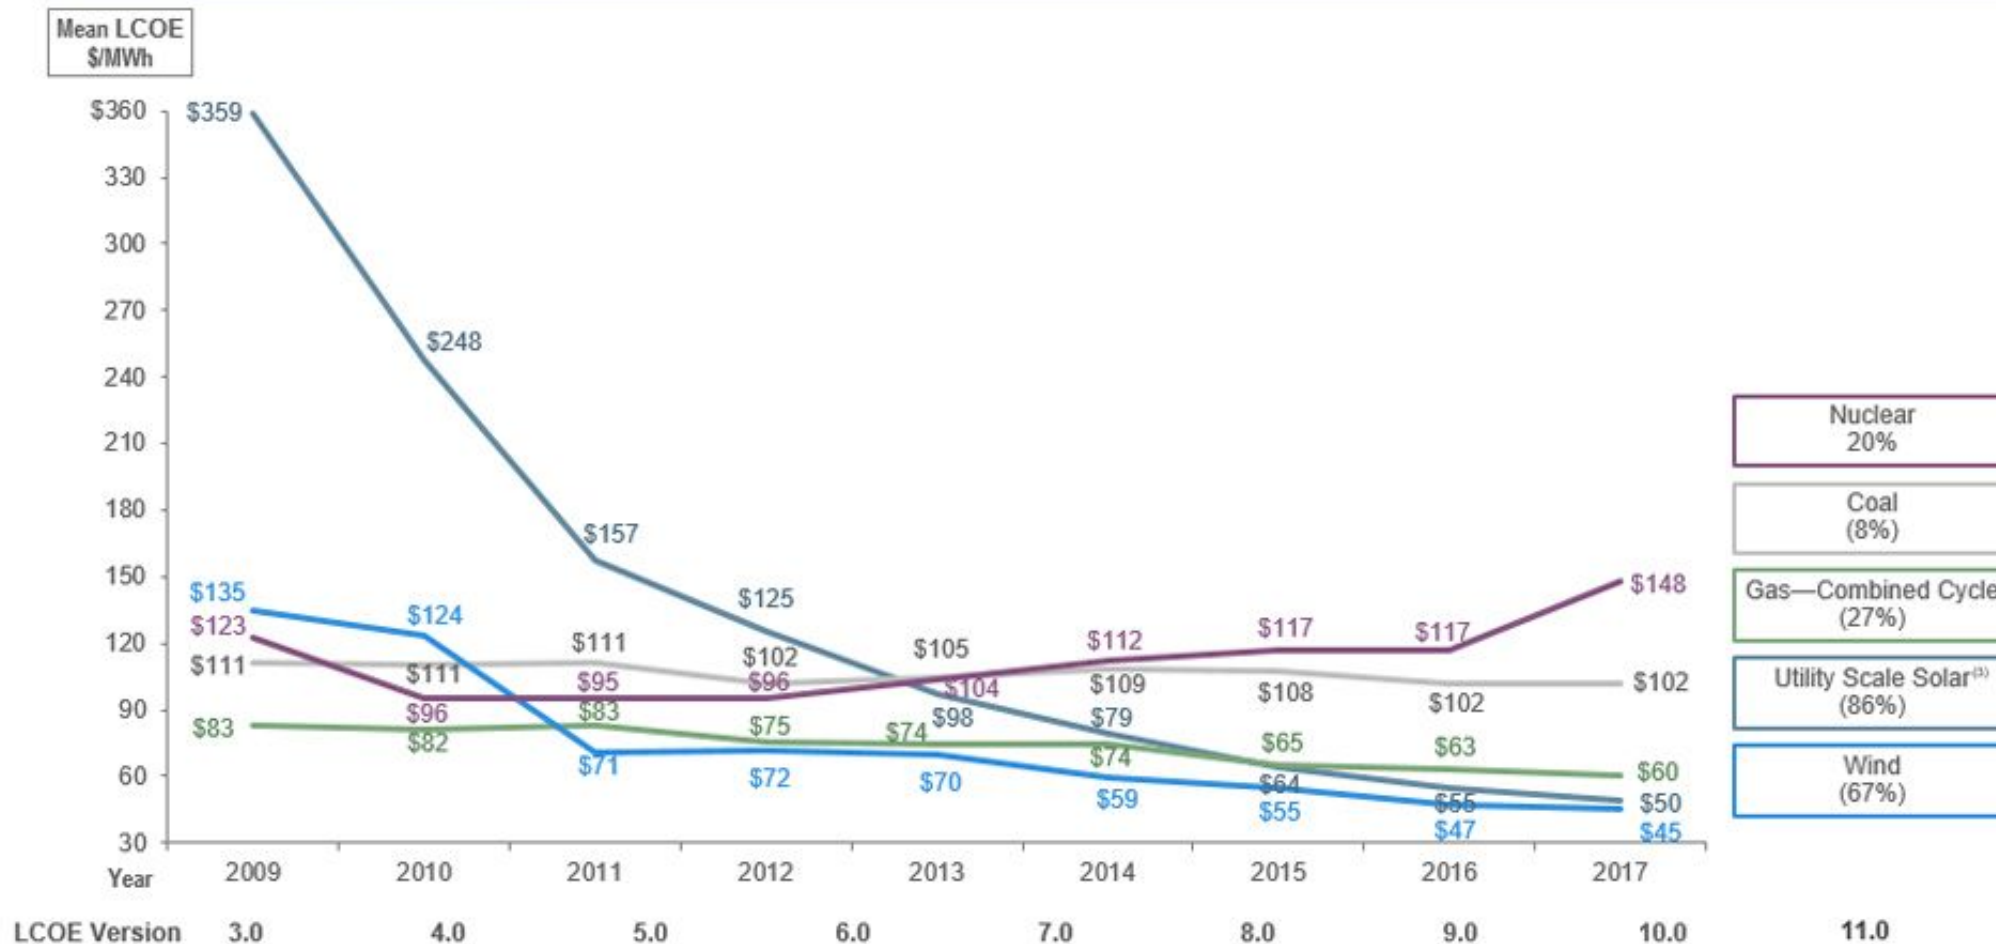

Source: Lazard estimates.

Note: Reflects average of unsubsidized high and low LCOE range for given version of LCOE study.

- (1) Primarily relates to North American alternative energy landscape, but reflects broader/global cost declines.
- (2) Reflects total decrease in mean LCOE since the later of Lazard's LCOE—Version 3.0 or the first year Lazard has tracked the relevant technology.
- (3) Reflects mean of fixed-tilt (high end) and single-axis tracking (low end) crystalline PV installations.

VOO|




Kes me oleme?

Miks me seda teeme?


Meie tahame sellist Eestit:


- Unikaalne;
- Sünergiat loov;
- Suure lisandväärtusega;
- Ettevõtlik.

Eestis on innovaatilisi tooteid ja teenuseid turule toovate ettevõtete osakaal OECD madalaim (2017)

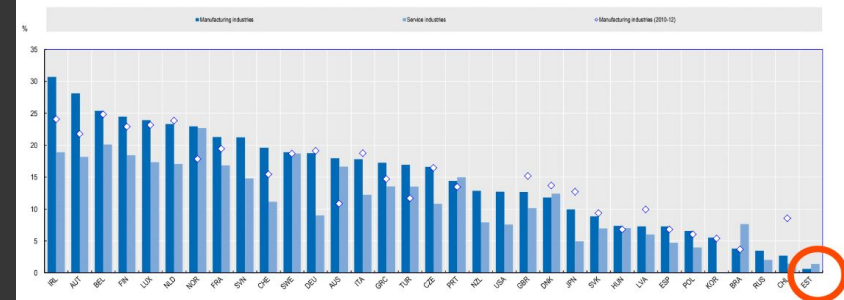

Kasum, kulud ja riigieelarve, tEUR

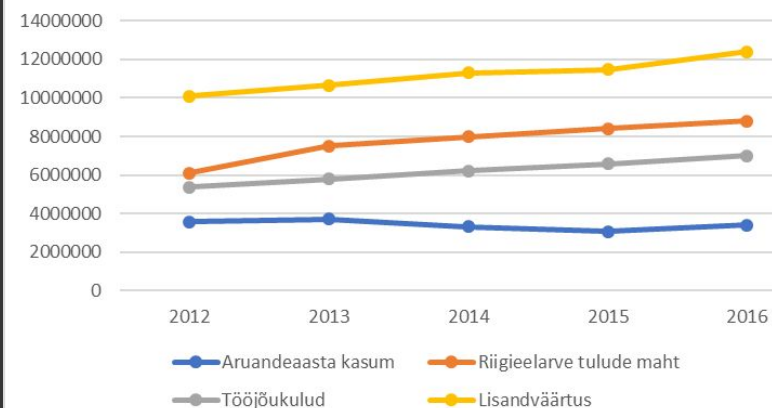

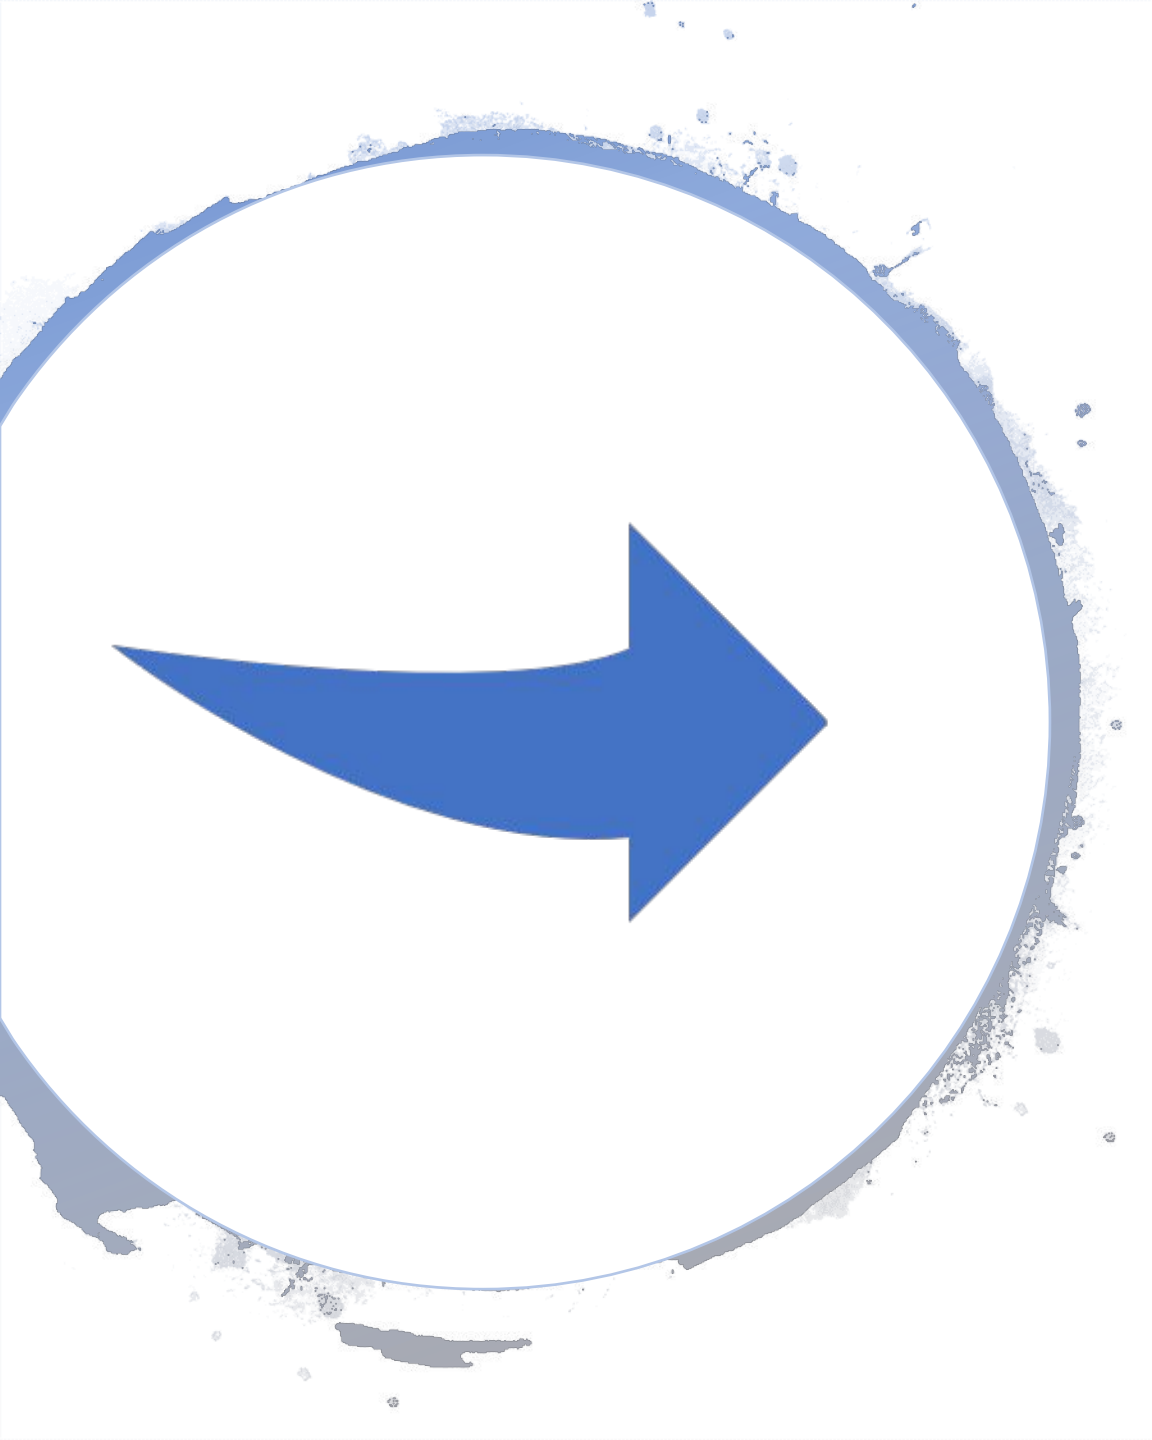

Projektiidee

Kahe strateegilise valdkonna teadmise
ühendamine ja väljakutsete lahendamine
muudab projekti majanduslikult tasuvaks ja
ühiskonnale kasulikuks

- Energeetika
- Ehitusmaterjalide tootmine

Teiste mõtteid idee toetuseks

- According to market research firm IHS, the global energy storage market is growing exponentially to an annual installation size of 6 gigawatts (GW) in 2017 and over 40 GW by 2022 — from an initial base of only 0.34 GW installed in 2012 and 2013
- “A next-generation [smart grid](#) without [energy storage](#) is like a computer without a hard drive: severely limited.”
- Katie Fehrenbacher, GigaOm



Kogemustepagas

Maailmas sajad PHAJ, Baltimaades Kruonise PHAJ Leedus;

1980-ndad ehitusgeoloogilised uuringud Maardu graniidimaardlas: ehituskillustik, kaeveõõnte teisene kasutus – hüdro-akumulatsioonijaam

2001 kaevandusloa taotlus Maardu II graniidimaardla kasutuselevõtuks – polnud majanduslikult otstarbekas

2009 – 2016 PHAJ Jõelähtme vallas

2013 – EU PCI project, ühishuviprojekt (nt Estlink 1 ja 2, Harku-Keila-Sindi, Eesti-Läti 3.ühendus, jne.)

2016 –Paldiski

Miks Paldiski?:


- Kivimi kvaliteet, mere sügavus
- Koostöö KOV-ga esimesest päevast
- Koostöö RahM, MKM

Eestile


1. Majandus
 - Energiahinna vähenemine ja prognoositavus
 - Suur lisandväärtus hõivatud kohtades
 - Väliskaubandusbilansi oluline paranemine
2. Energeetika
 - EU PCI project
 - Salvestus kui energeetika põhiküsimus
 - Võimalikud (!?) süsteemiteenused: inerts, pöörlev reserv, black-start, regionaalse stabiilsuse kontroll, sünkroonne kondensaator, ülekandekulude vähendamine süsteemide vahel
3. Keskkond
 - CO2 vähendamine energeetikas (ca. 10-15mEUR/a) ja maavarade kasutamises
 - Maakasutuse ja ressursikasutuse paranemine
 - Kestvamad teed

Struktursed muutused toetavad PHAJ rajamist

Wind and solar expansion¹

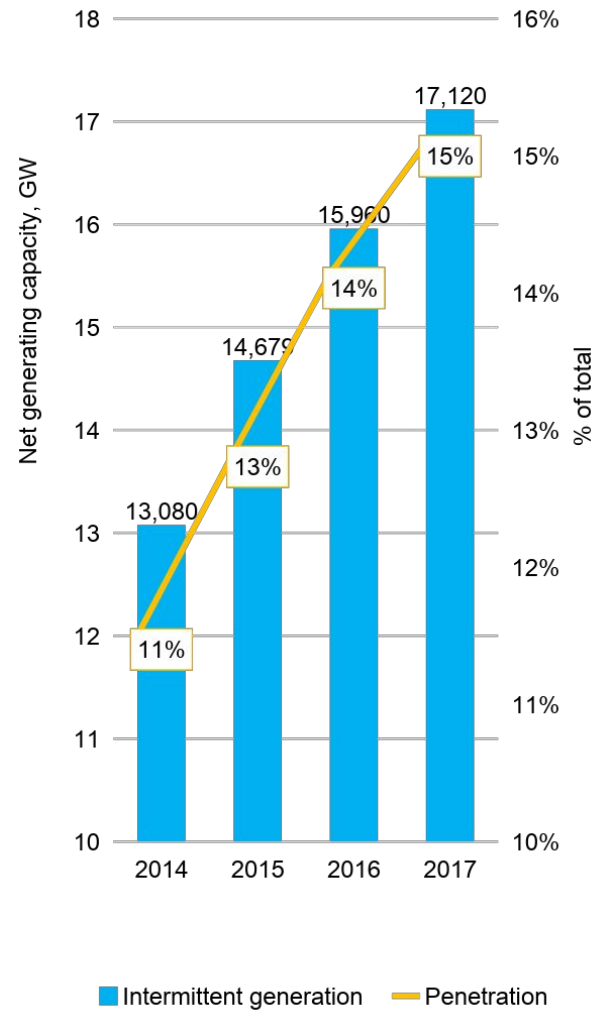

Less competition at peak demand¹

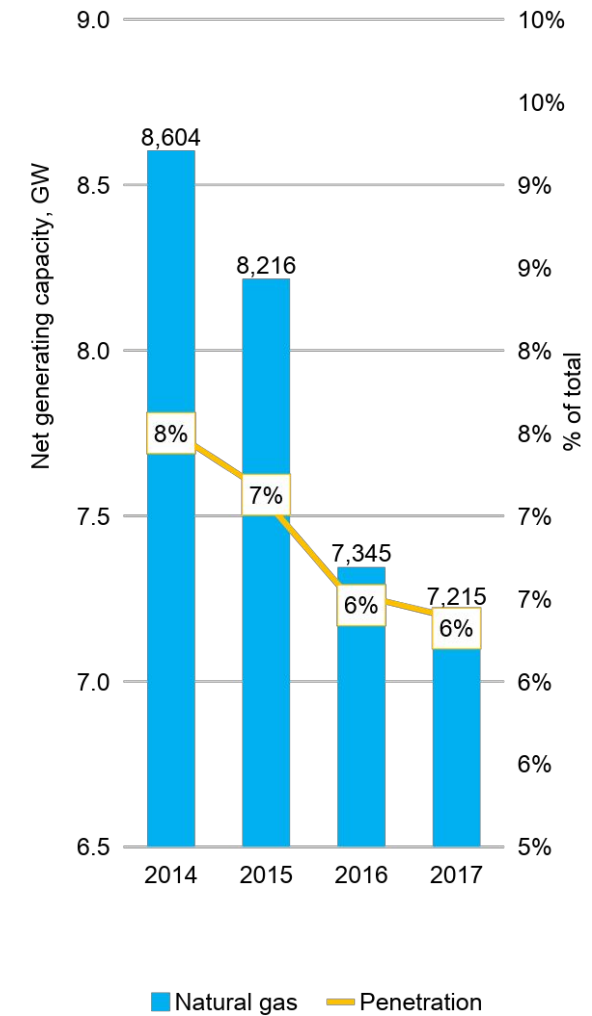

¹ Source: ENTSO-E

² Extreme price defined as period average price +/- 2x standard deviation, assuming normal distribution ca 5% of observations should be excluded (implied boundaries >60,6 EUR/MWh and <8,4 EUR/MWh)

		Selected Advantages	Selected Disadvantages
Mechanical/Gravity/Thermal	Compressed Air	<ul style="list-style-type: none"> • Low cost, flexible sizing, relatively large-scale • Mature technology and well-developed design • Proven track record of safe operation • Leverages existing gas turbine technologies 	<ul style="list-style-type: none"> • Requires suitable geology • Relatively difficult to modularize for smaller installations • Exposure to natural gas price changes • Relies on natural gas
	Flywheel	<ul style="list-style-type: none"> • High power density and scalability for short-duration technology; low power, higher energy for long-duration technology • High depth of discharge capability • Compact design with integrated AC motor 	<ul style="list-style-type: none"> • Relatively low energy capacity • High heat generation • Sensitive to vibrations
	Pumped Hydro	<ul style="list-style-type: none"> • Mature technology (commercially available; leverages existing hydropower technology) • High-power capacity solution • Large scale, easily scalable in power rating 	<ul style="list-style-type: none"> • Relatively low energy density • Limited available sites (i.e., water availability required) • Cycling generally limited to once per day
	Thermal	<ul style="list-style-type: none"> • Low cost, flexible sizing, relatively large-scale • Power and energy ratings independently scalable • Leverages mature industrial cryogenic technology base; can utilize waste industrial heat to improve efficiency 	<ul style="list-style-type: none"> • Technology is pre-commercial • Difficult to modularize for smaller installations • On-site safety concerns from cryogenic storage
Chemical	Flow Battery [‡]	<ul style="list-style-type: none"> • Power and energy profiles independently scalable for Vanadium system • Zinc-Bromide designed in fixed modular blocks for system design • No degradation in “energy storage capacity” • No potential for fire • High cycle/lifespan 	<ul style="list-style-type: none"> • Power and energy rating scaled in a fixed manner for zinc-bromide technology • Electrolyte based on acid • Relatively high balance of system costs • Reduced efficiency due to rapid charge/discharge
	Lead-Acid [‡]	<ul style="list-style-type: none"> • Mature technology with established recycling infrastructure • Advanced lead-acid technologies leverage existing technologies • Low cost 	<ul style="list-style-type: none"> • Poor ability to operate in a partially charged state • Relatively poor depth of discharge and short lifespan • Acid based electrolyte
	Lithium-Ion ^{‡(1)}	<ul style="list-style-type: none"> • Multiple chemistries available • Rapidly expanding manufacturing base leading to cost reductions • Efficient power and energy density • Cost reduction continues 	<ul style="list-style-type: none"> • Cycle life limited, especially in harsh conditions • Safety issues from overheating • Requires advanced manufacturing capabilities to achieve high performance
	Sodium [‡]	<ul style="list-style-type: none"> • High temperature technology: Relatively mature technology (commercially available); high energy capacity and long duration • Low temperature technology: Smaller scale design; emerging technology and low-cost potential; safer 	<ul style="list-style-type: none"> • Although mature, inherently higher costs—low temperature batteries currently have a higher cost with lower efficiency • Potential flammability issues for high-temperature batteries • Poor cycling capability
	Zinc [‡]	<ul style="list-style-type: none"> • Deep discharge capability • Designed for long life • Designed for safe operation 	<ul style="list-style-type: none"> • Currently unproven commercially • Lower efficiency • Poor cycling/rate of charge/discharge




Technologies analyzed in LCOS 3.0.

Source: DOE Energy Storage Database.

‡ Denotes battery technology.

(1) Lithium-Ion assessed on this report is NMC (Lithium, Nickel, Manganese, Cobalt).

Levelized Cost of Storage Components—Low

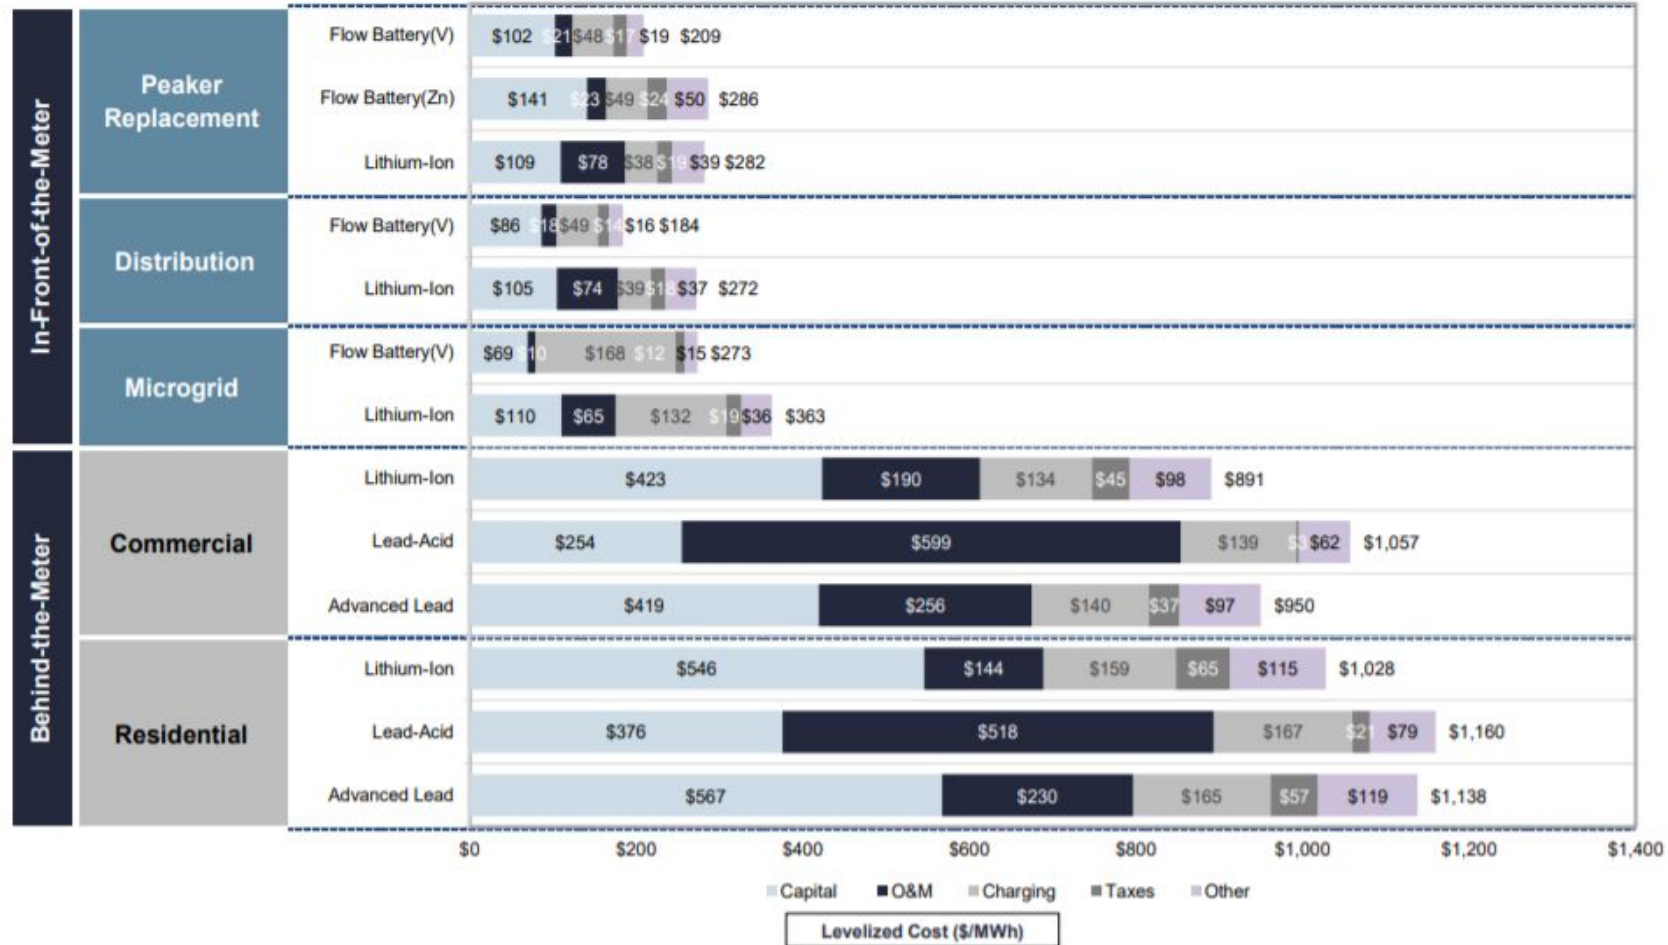



Source: Lazard and Enovation Partners estimates.
 Note: O&M costs include augmentation costs.


Elektrienergia hind LCOE

Alternatiivsed tehnoloogiad


Traditsionaalsed tehnoloogiad

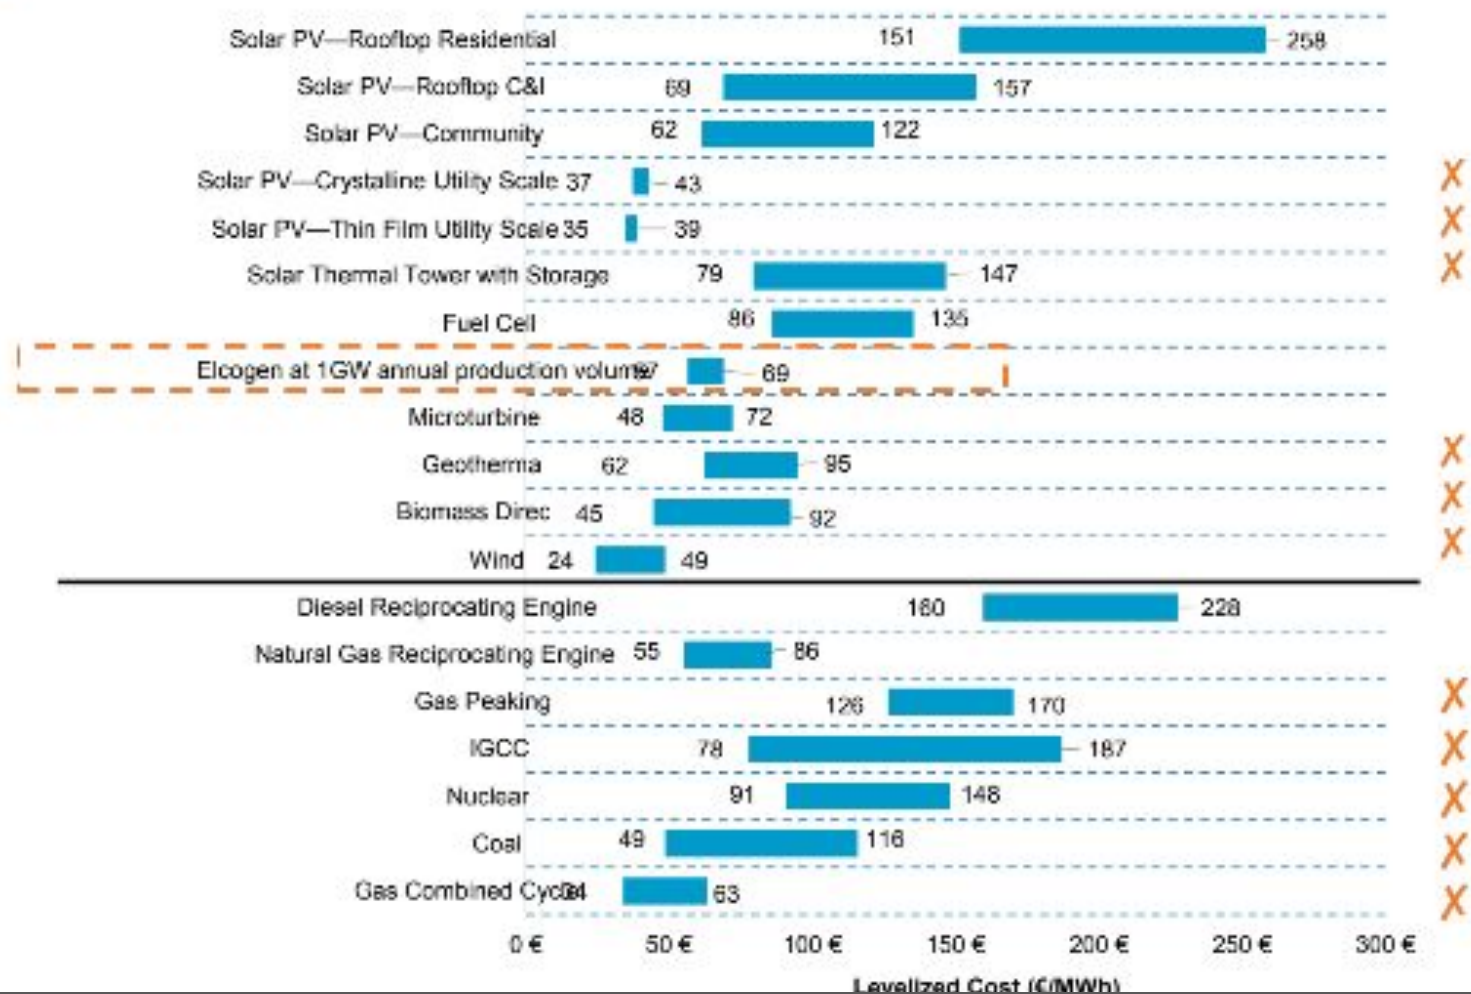

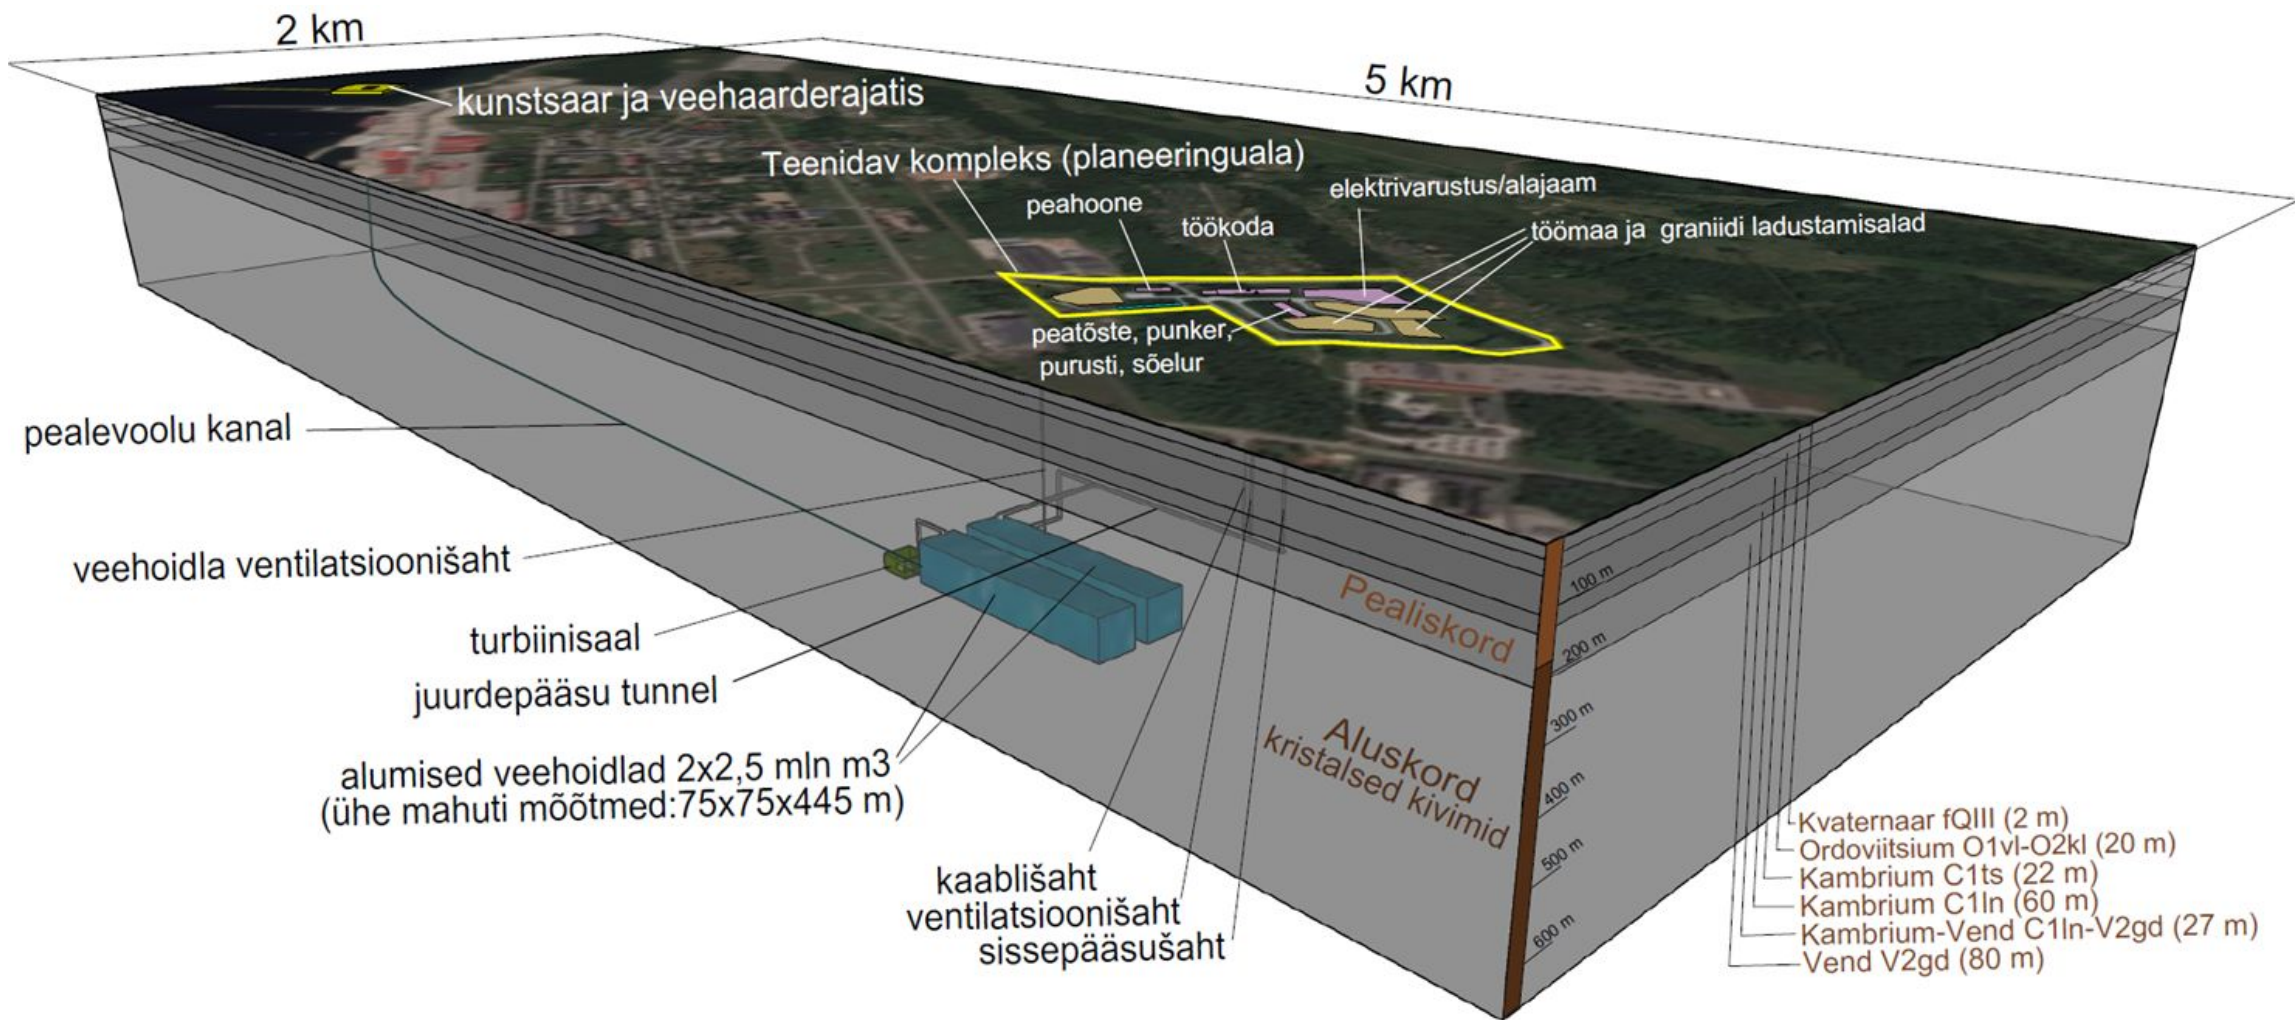


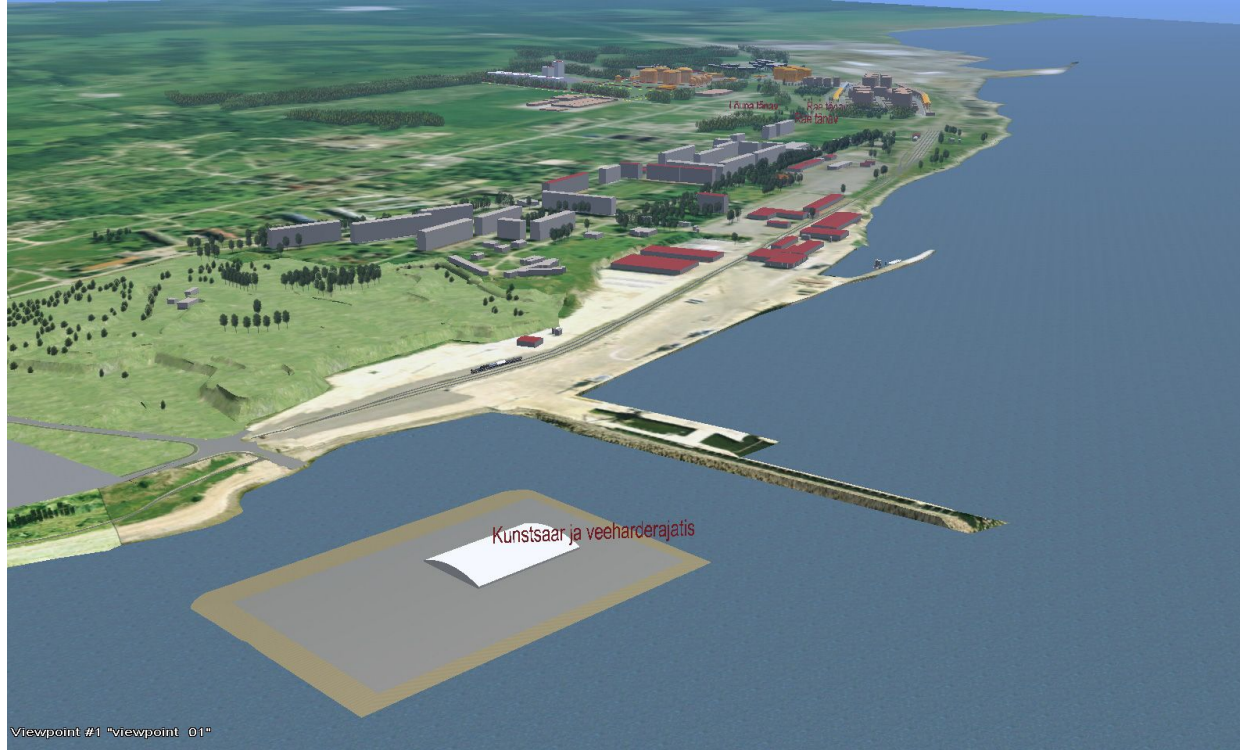



Viewpoint #1 "viewpoint_01"

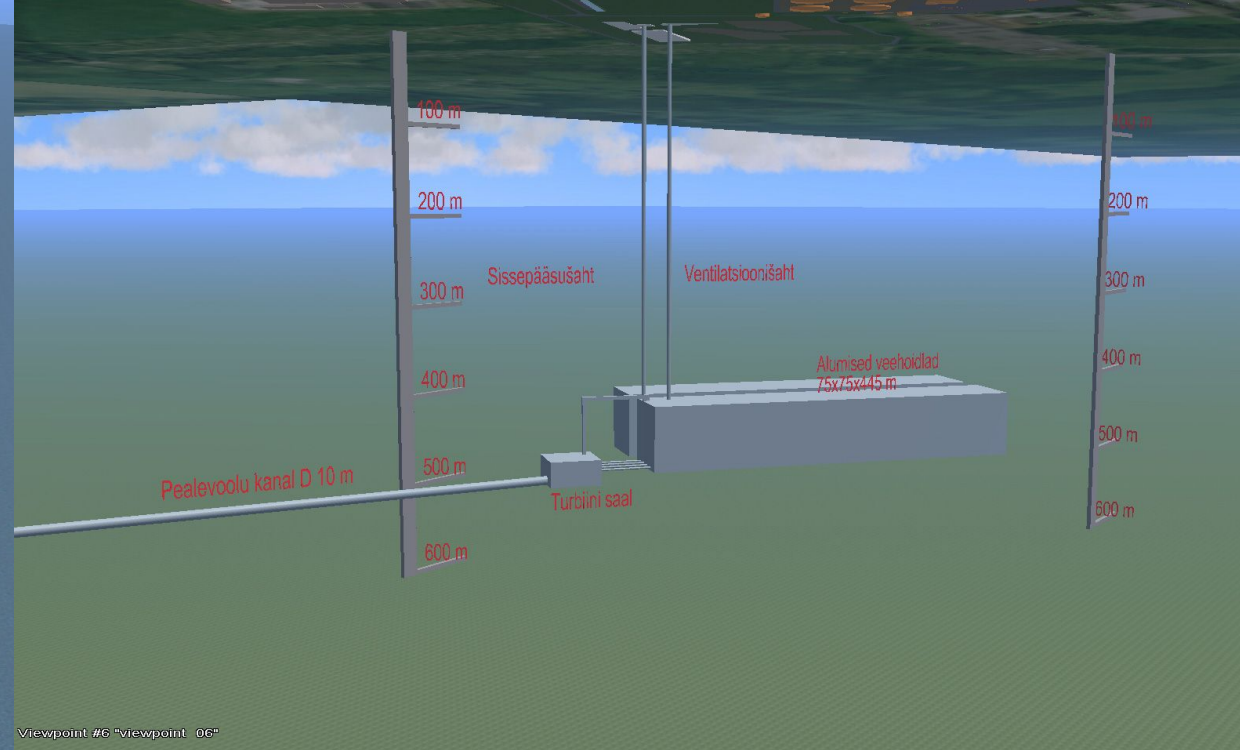



Viewpoint #6 "viewpoint_06"

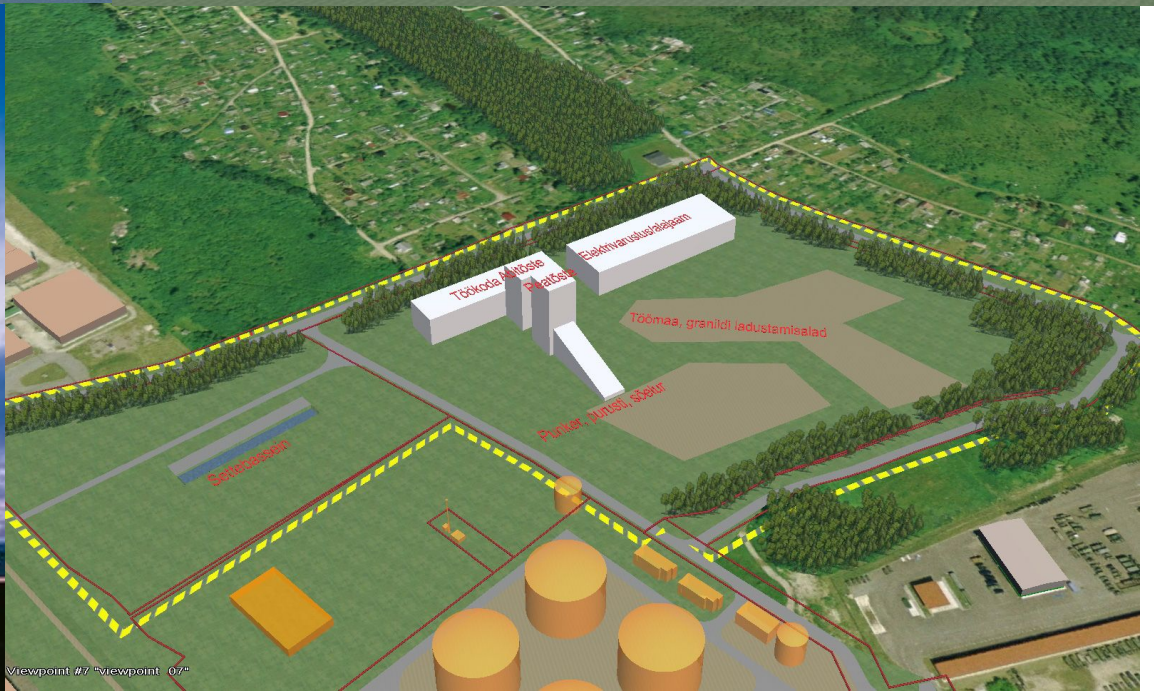

Viewpoint #7 "viewpoint_07"

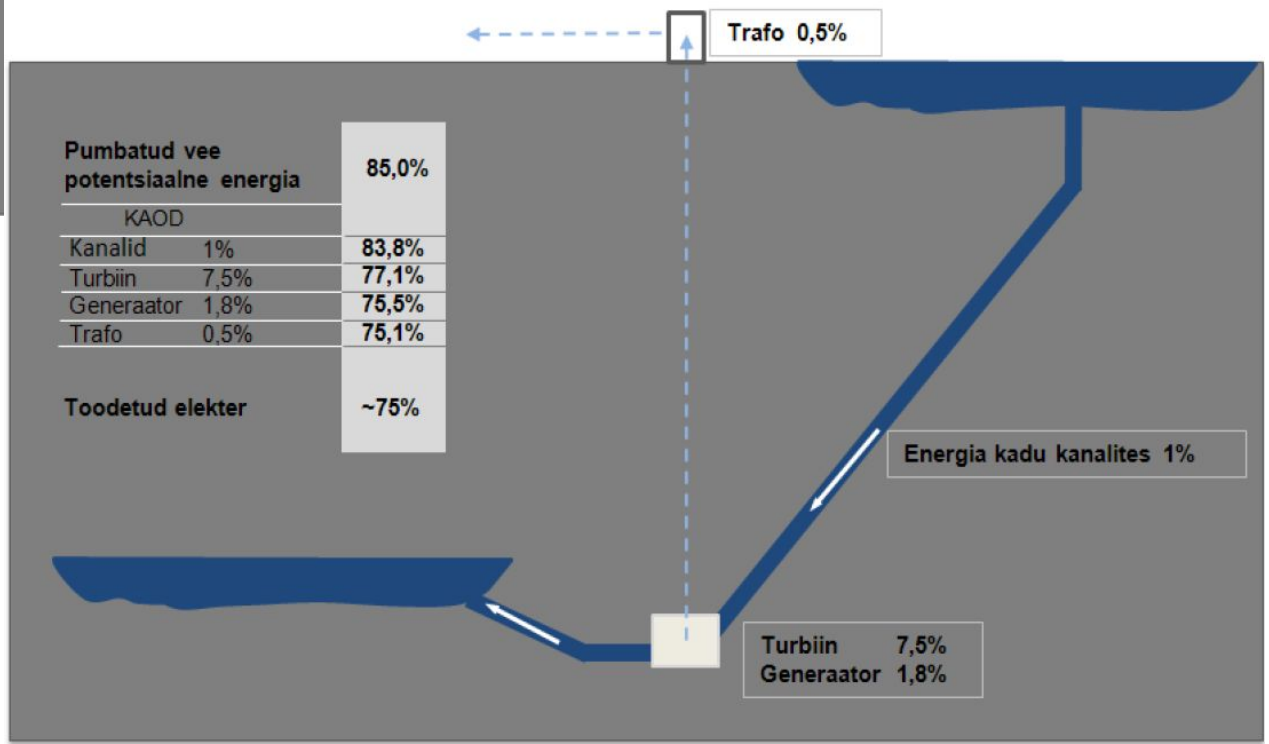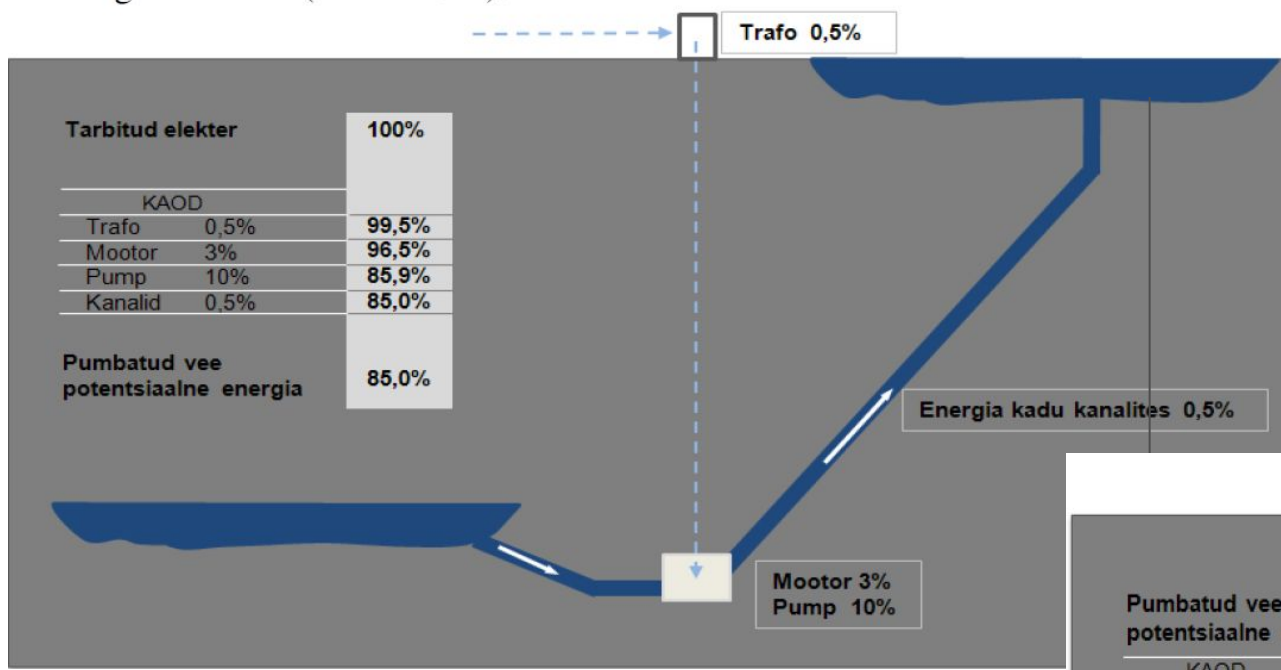

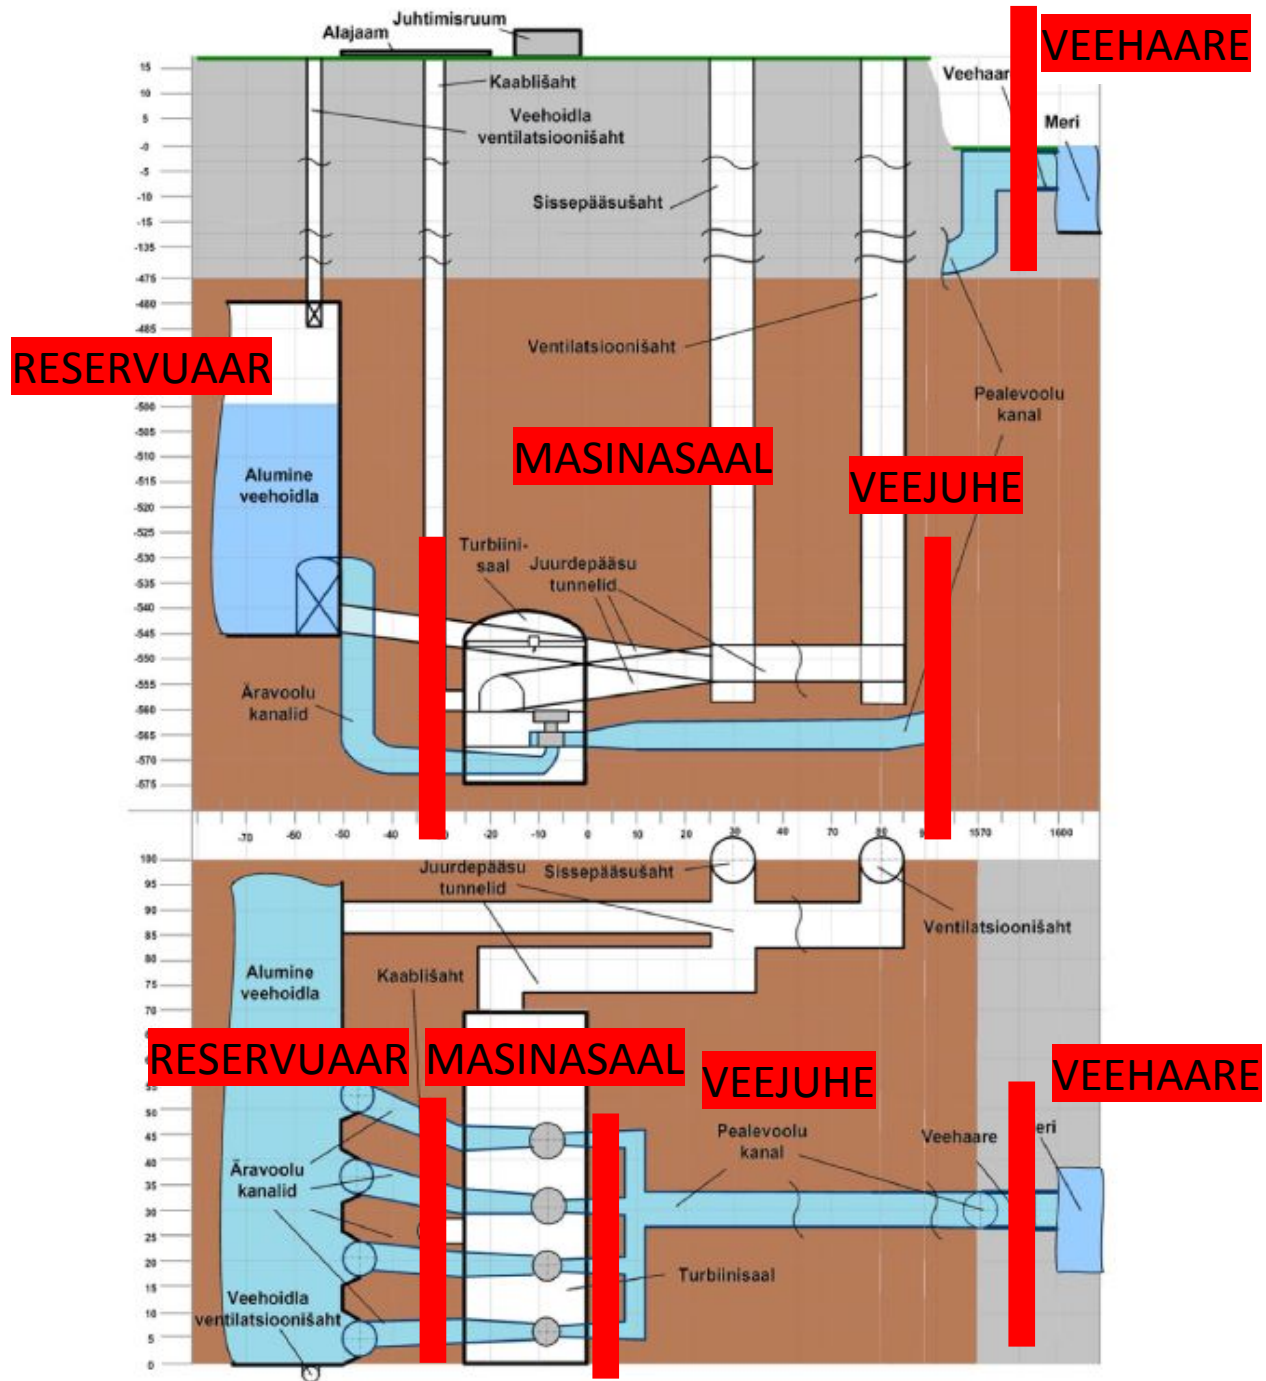

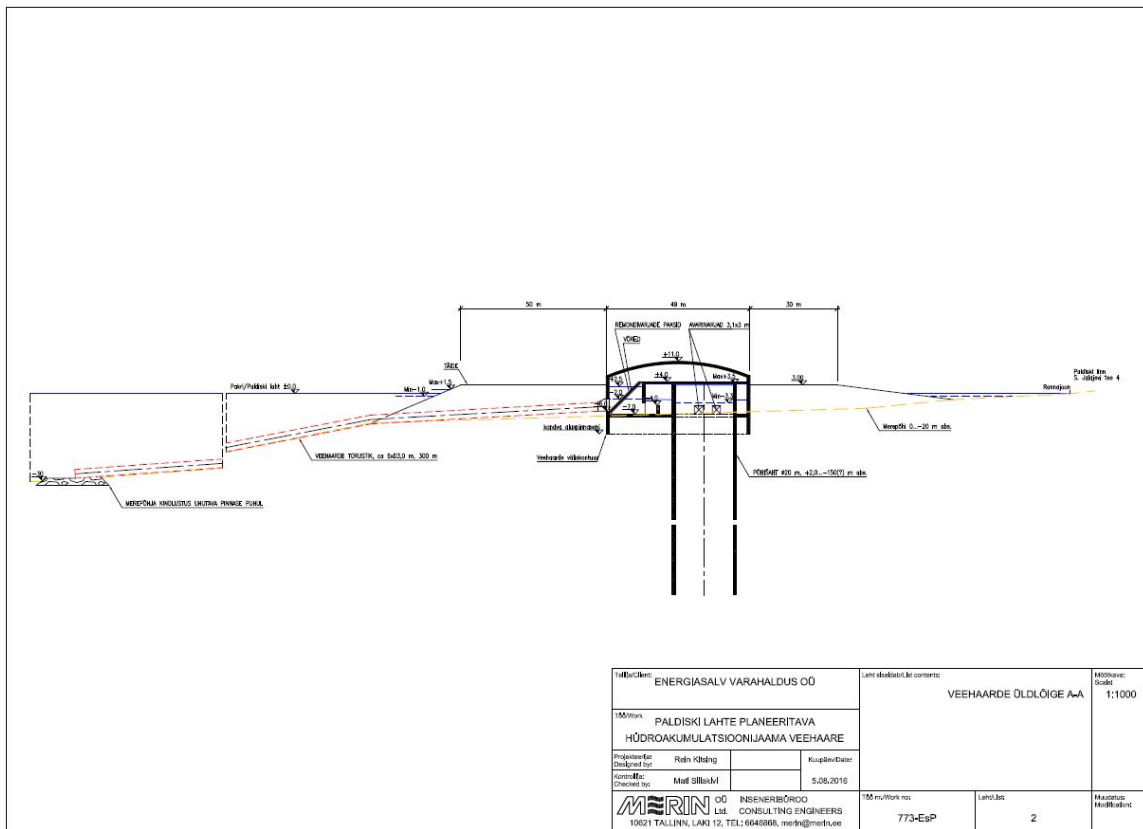

Tellijätk: ENERGIASALV VARAHALDUS OÜ		Lennu tegevise k: content:		Mõõtmise: 1:1000	
Töönime: PALDISKI LAHTE PLANEERITAVA HÜDROAKUMULATSIOONIJAMMA VEEHAARE		VEEHAARDE ÕLDLÕIGE A-A			
Projektor: Rait Kõhng	Disainer: Rait Kõhng	Kaardid: 5.08.2016			
Kontroll: Mad Sillakivi	Check: Mad Sillakivi				
MERIN OÜ INŽENERSÕNDKOOL LTD. CONSULTING ENGINEERS 10121 TALLINN, LAHI 12, TEL: 6648866, merin@merin.ee		Töö nr./work no: 773-EsP	Lennu järk: 2	Mõõtmise: Mõõtmise	


Tegevus	Aasta
DP, HL, KSH, KMH	2016-2018
Ehitusluba	2019
Algkaeveõõned	2020-2021
Ehitus	2021-2027
Veehaare	2025-2027
330 kV	2025-2026
Elektriseadmed	2025-2027
Käivitamine	2028



TÄNAN!
KÜSIMUSED...

Summary Findings of Lazard's 2017 Levelized Cost of Energy Analysis⁽¹⁾

Selected Historical Mean LCOE Values⁽²⁾

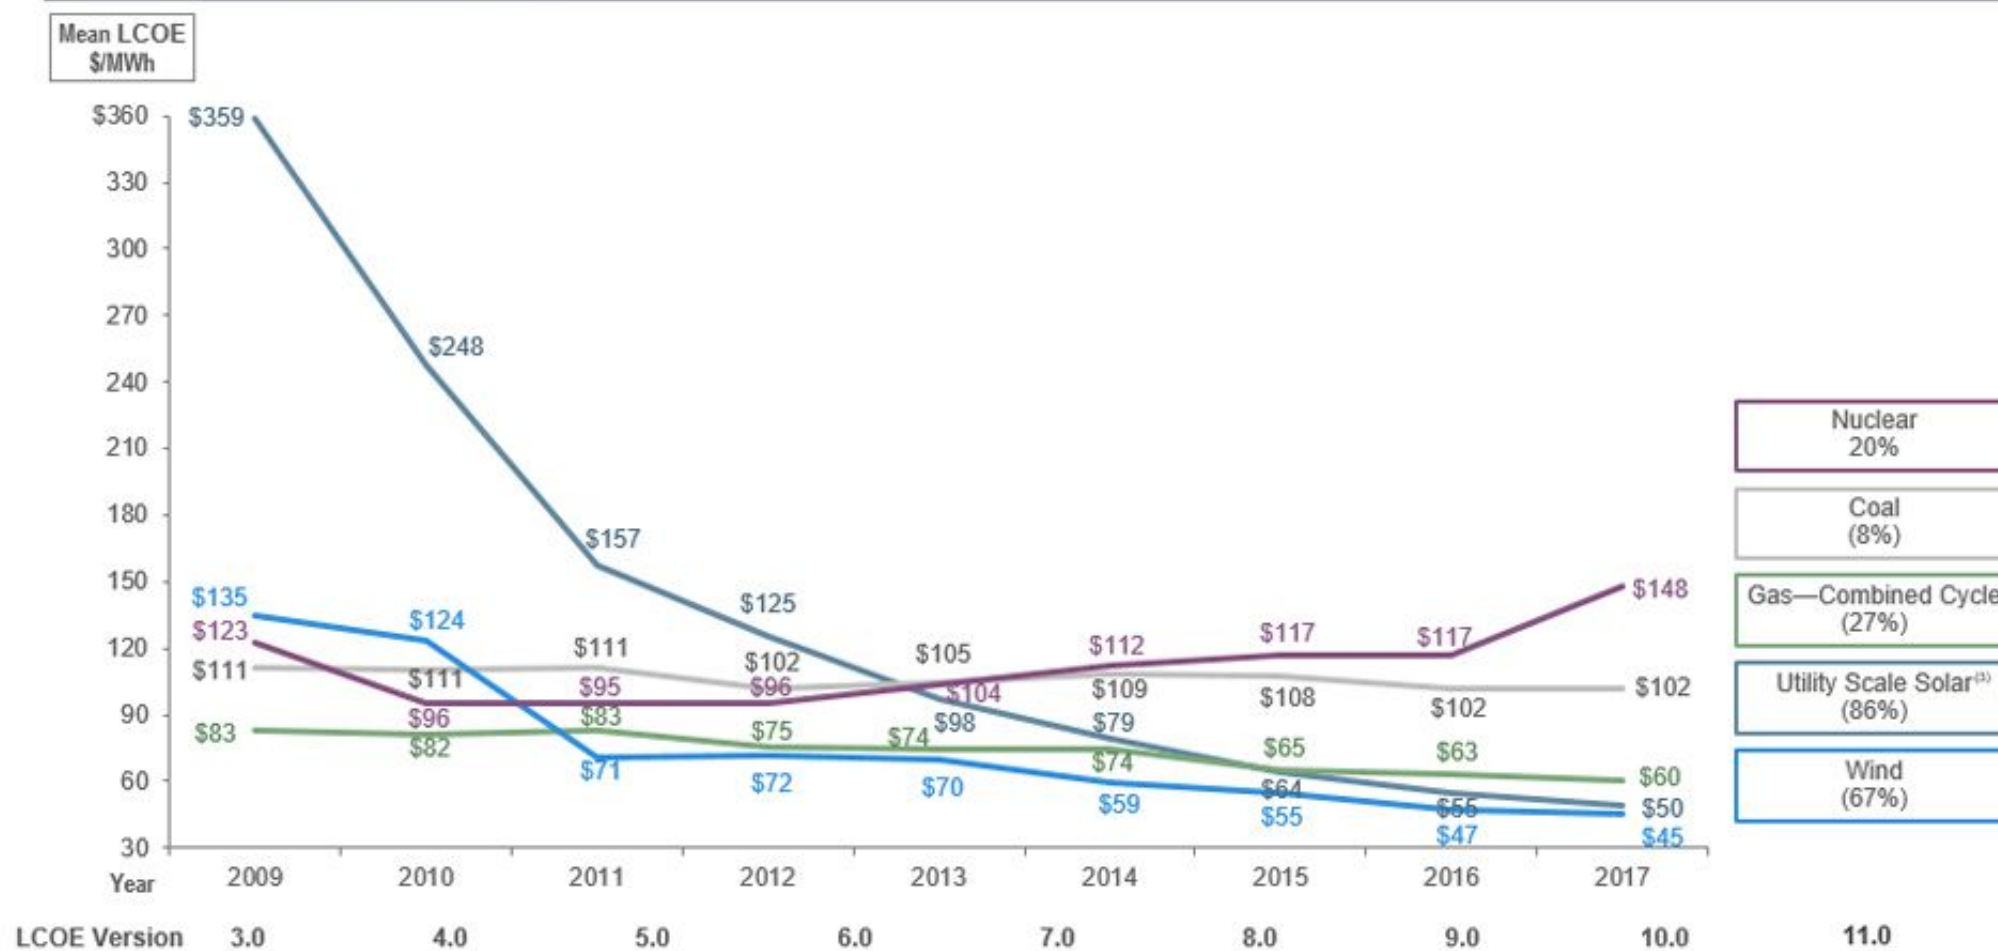

Source: Lazard estimates.

Note: Reflects average of unsubsidized high and low LCOE range for given version of LCOE study.

- (1) Primarily relates to North American alternative energy landscape, but reflects broader/global cost declines.
- (2) Reflects total decrease in mean LCOE since the later of Lazard's LCOE—Version 3.0 or the first year Lazard has tracked the relevant technology.
- (3) Reflects mean of fixed-tilt (high end) and single-axis tracking (low end) crystalline PV installations.